


Captive Screw Type 1 5/16-24 Thread

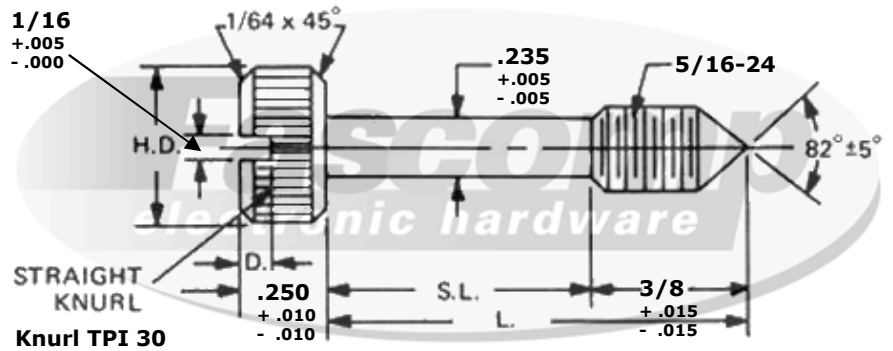

Captive Screws - 15/16-24 Thread					
FCXXXX	Length (L)	H.D. +.015 -.000	S.L. +.010 -.010	D. +.010 -.000	
FC0333	1	9/16	5/8	3/32	
FC0334	1-1/16	9/16	11/16	3/32	
FC0335	1-1/8	9/16	3/4	3/32	
FC0336	1-3/16	9/16	13/16	3/32	
FC0337	1-1/4	9/16	7/8	3/32	
FC0338	1-5/16	9/16	15/16	3/32	
FC0339	1-3/8	9/16	1	3/32	
FC0340	1-7/16	9/16	1-1/16	3/32	
FC0341	1-1/2	9/16	1-1/8	3/32	
FC0342	1-9/16	9/16	1-3/16	3/32	
FC0343	1-5/8	9/16	1-1/4	3/32	
FC0344	1-11/16	9/16	1-5/16	3/32	
FC0345	1-3/4	9/16	1-3/8	3/32	
FC0346	1-13/16	9/16	1-7/16	3/32	
FC0347	1-7/8	9/16	1-1/2	3/32	
FC0348	1-15/16	9/16	1-9/16	3/32	
FC0349	2	9/16	1-5/8	3/32	
FC0350	1	3/4	5/8	1/8	
FC0351	1-1/16	3/4	11/16	1/8	
FC0352	1-1/8	3/4	3/4	1/8	
FC0353	1-3/16	3/4	13/16	1/8	
FC0354	1-1/4	3/4	7/8	1/8	
FC0355	1-5/16	3/4	15/16	1/8	
FC0356	1-3/8	3/4	1	1/8	
FC0357	1-7/16	3/4	1-1/16	1/8	
FC0358	1-1/2	3/4	1-1/8	1/8	
FC0359	1-9/16	3/4	1-3/16	1/8	
FC0360	1-5/8	3/4	1-1/4	1/8	
FC0361	1-11/16	3/4	1-5/16	1/8	
FC0362	1-3/4	3/4	1-3/8	1/8	
FC0363	1-13/16	3/4	1-7/16	1/8	
FC0364	1-7/8	3/4	1-1/2	1/8	
FC0365	1-15/16	3/4	1-9/16	1/8	
FC0366	2	3/4	1-5/8	1/8	

Create a part number:

Length	Material	Finish
FCXXXX	XX	XX
_____ - _____ - _____		

Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

Material

Material Code (XX)

B	Brass
S	Steel
SS	Stainless Steel

Compatible Finish (XX)

B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)

Tolerances
Unless otherwise Specified
.xxx +/- .005
.xx +/- .010
Angular +/- 1 Degree
Linear +/- .005
Break all sharp edges



This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.