


Captive Screw Type 1 8-32 Thread

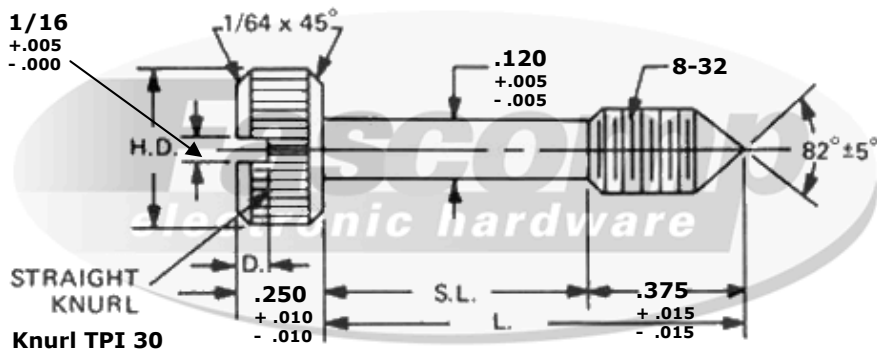

Create a part number:

Length	Material	Finish
FCXXXX	XX	XX

Captive Screws - 8-32 Thread

FCXXXX	Length (L)	H.D. +.015/-0.000	S.L. +.010/-0.010	D. +.010/-0.000
FC0115	5/8	7/16	1/4	1/16
FC0116	11/16	7/16	5/16	1/16
FC0117	3/4	7/16	3/8	1/16
FC0118	13/16	7/16	7/16	1/16
FC0119	7/8	7/16	1/2	1/16
FC0120	15/16	7/16	9/16	1/16
FC0121	1	7/16	5/8	1/16
FC0122	1-1/16	7/16	11/16	1/16
FC0123	1-1/8	7/16	3/4	1/16
FC0124	1-3/16	7/16	13/16	1/16
FC0125	1-1/4	7/16	7/8	1/16
FC0126	1-5/16	7/16	15/16	1/16
FC0127	1-3/8	7/16	1	1/16
FC0128	1-7/16	7/16	1-1/16	1/16
FC0129	1-1/2	7/16	1-1/8	1/16
FC0130	1-9/16	7/16	1-3/16	1/16
FC0131	1-5/8	7/16	1-1/4	1/16
FC0132	1-11/16	7/16	1-5/16	1/16
FC0133	1-3/4	7/16	1-3/8	1/16
FC0134	1-13/16	7/16	1-7/16	1/16
FC0135	1-7/8	7/16	1-1/2	1/16
FC0136	1-15/16	7/16	1-9/16	1/16
FC0137	2	7/16	1-5/8	1/16

Material

Material Code (XX)
B Brass
S Steel
SS Stainless Steel

Compatible Finish (XX)

B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)

Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware



This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.