


# Captive Screw Type 2 1/4-28 Thread

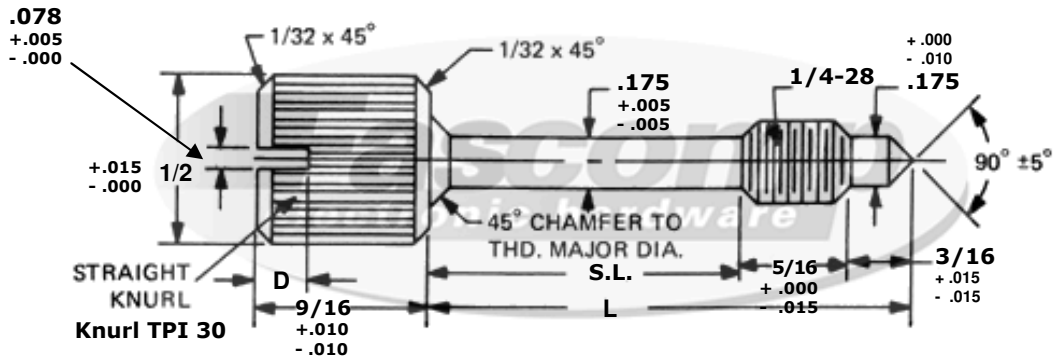

Create a part number:

Length	Material	Finish
FCXXXX	XX	XX
_____ - _____ - _____		

Captive Screws - 1/4-28 Thread				
FCXXXX	Length (L)	S.L. +.010 -.010	D. +.010 -.000	
FC0490	5/8	1/8	.093	
FC0491	11/16	3/16	.093	
FC0492	3/4	1/4	.093	
FC0493	13/16	5/16	.093	
FC0494	7/8	3/8	.093	
FC0495	15/16	7/16	.093	
FC0496	1	1/2	.093	
FC0497	1-1/16	9/16	.093	
FC0498	1-1/8	5/8	.093	
FC0499	1-3/16	11/16	.093	
FC0500	1-1/4	3/4	.093	
FC0501	1-5/16	13/16	.093	
FC0502	1-3/8	7/8	.093	
FC0503	1-7/16	15/16	.093	
FC0504	1-1/2	1	.093	
FC0505	1-9/16	1-1/6	.093	
FC0506	1-5/8	1-1/8	.093	
FC0507	1-11/16	1-3/16	.093	
FC0508	1-3/4	1-1/4	.093	
FC0509	1-13/16	1-5/16	.093	
FC0510	1-7/8	1-3/8	.093	
FC0511	1-15/16	1-7/16	.093	
FC0512	2	1-1/2	.093	

Material	
Material Code (XX)	
B	Brass
S	Steel
SS	Stainless Steel

Compatible Finish (XX)		
B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	

Source Control Drawing:  
To be produced by  
Fascomp Electronic Hardware

**Tolerances Unless otherwise Specified**  
.xxx +/- .005  
.xx +/- .010  
Angular +/- 1 Degree  
Linear +/- .005  
**Break all sharp edges**



This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.