


Captive Screw Type 2 3/8-16 Thread

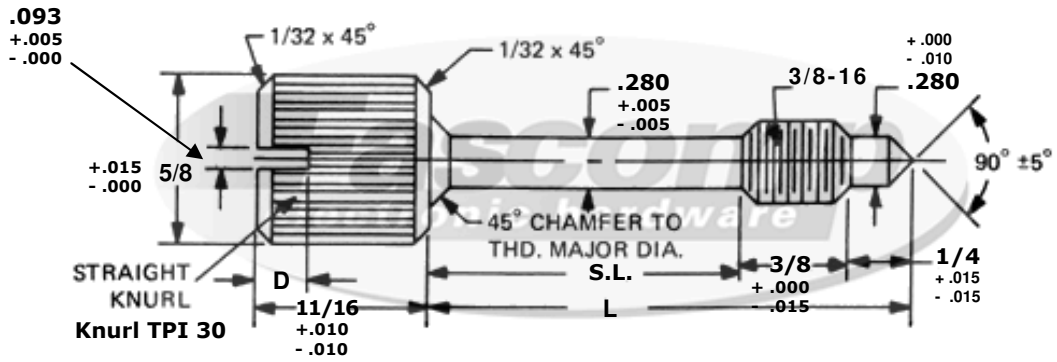

Create a part number:

Length	Material	Finish
FCXXXX	XX	XX
_____ - _____ - _____		

Captive Screws - 3/8-16 Thread				
FCXXXX	Length (L)	S.L. +.010 -.010	D. +.010 -.000	
FC0551	1	3/8	.125	
FC0552	1-1/16	7/16	.125	
FC0553	1-1/8	1/2	.125	
FC0554	1-3/16	9/16	.125	
FC0555	1-1/4	5/8	.125	
FC0556	1-5/16	11/16	.125	
FC0557	1-3/8	3/4	.125	
FC0558	1-7/16	13/16	.125	
FC0559	1-1/2	7/8	.125	
FC0560	1-9/16	15/16	.125	
FC0561	1-5/8	1	.125	
FC0562	1-11/16	1-1/16	.125	
FC0563	1-3/4	1-1/8	.125	
FC0564	1-13/16	1-3/16	.125	
FC0565	1-7/8	1-1/4	.125	
FC0566	1-15/16	1-5/16	.125	
FC0567	2	1-3/8	.125	

Material	
Material Code (XX)	
B	Brass
S	Steel
SS	Stainless Steel

Compatible Finish (XX)	
B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)

Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

**Tolerances
Unless otherwise Specified**
.xxx +/- .005
.xx +/- .010
Angular +/- 1 Degree
Linear +/- .005
Break all sharp edges



This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.