


Captive Screw Type 2 4-40 Thread

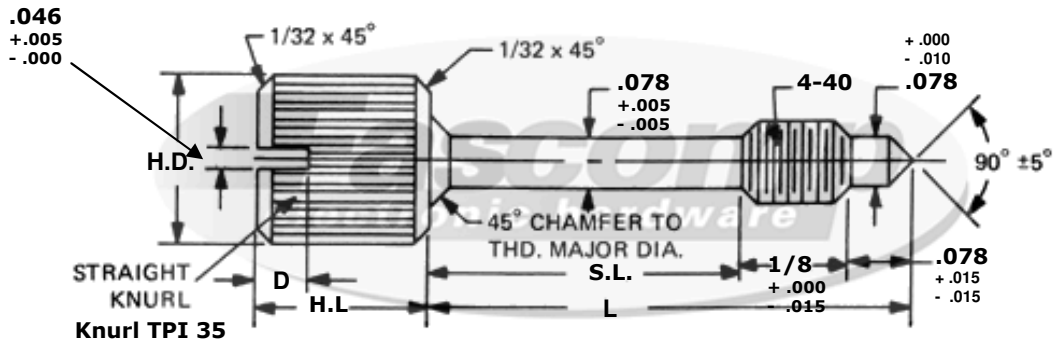

Create a part number:

Length	Material	Finish
FCXXXX	XX	XX
_____ - _____ - _____		

Captive Screws - 4-40 Thread						
FCXXXX	Length (L)	H.D. +.015 -.000	H.L. +.010 -.010	S.L. +.010 -.010	D. +.010 -.000	
FC0367	3/8	1/4	1/4	11/64	.078	
FC0368	7/16	1/4	1/4	15/64	.078	
FC0369	1/2	1/4	1/4	19/64	.078	
FC0370	9/16	1/4	1/4	23/64	.078	
FC0371	5/8	1/4	1/4	27/64	.078	
FC0372	11/16	1/4	1/4	31/64	.078	
FC0373	3/4	1/4	1/4	35/64	.078	
FC0374	13/16	1/4	1/4	39/64	.078	
FC0375	7/8	1/4	1/4	43/64	.078	
FC0376	15/16	1/4	1/4	47/64	.078	
FC0377	1	1/4	1/4	51/64	.078	
FC0378	3/8	5/16	5/16	11/64	.078	
FC0379	7/16	5/16	5/16	15/64	.078	
FC0380	1/2	5/16	5/16	19/64	.078	
FC0381	9/16	5/16	5/16	23/64	.078	
FC0382	5/8	5/16	5/16	27/64	.078	
FC0383	11/16	5/16	5/16	31/64	.078	
FC0384	3/4	5/16	5/16	35/64	.078	
FC0385	13/16	5/16	5/16	39/64	.078	
FC0386	7/8	5/16	5/16	43/64	.078	
FC0387	15/16	5/16	5/16	47/64	.078	
FC0388	1	5/16	5/16	51/64	.078	

Material	
Material Code (XX)	
B	Brass
S	Steel
SS	Stainless Steel

Compatible Finish (XX)	
B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)

**Tolerances
Unless otherwise Specified**
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges



Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.