


Captive Screw Type 2 5/16-18 Thread

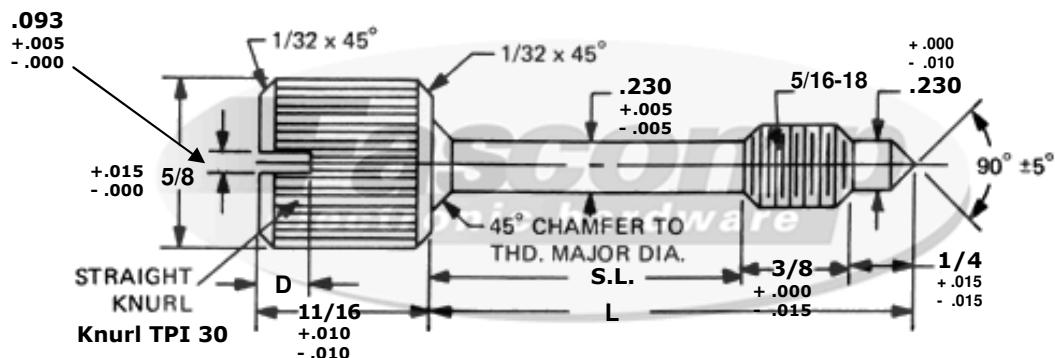

Create a part number:

Length	Material	Finish
FCXXXX	XX	XX

Captive Screws - 15/16-18 Thread				
✓ FCXXXX	Length (L)	S.L. (+.010, -.010)	D. (+.010, -.000)	
FC0513	7/8	1/4	.125	
FC0514	15/16	5/16	.125	
FC0515	1	3/8	.125	
FC0516	1-1/16	7/16	.125	
FC0517	1-1/8	1/2	.125	
FC0518	1-3/16	9/16	.125	
FC0519	1-1/4	5/8	.125	
FC0520	1-5/16	11/16	.125	
FC0521	1-3/8	3/4	.125	
FC0522	1-7/16	13/16	.125	
FC0523	1-1/2	7/8	.125	
FC0524	1-9/16	15/16	.125	
FC0525	1-5/8	1	.125	
FC0526	1-11/16	1-1/16	.125	
FC0527	1-3/4	1-1/8	.125	
FC0528	1-13/16	1-3/16	.125	
FC0529	1-7/8	1-1/4	.125	
FC0530	1-15/16	1-5/16	.125	
FC0531	2	1-3/8	.125	

Material		
✓ Material Code (XX)		
B	Brass	
S	Steel	
SS	Stainless Steel	

✓ Compatible Finish (XX)		
B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	

Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

Tolerances
Unless otherwise Specified
.xxx +/- .005
.xx +/- .010
Angular +/- 1 Degree
Linear +/- .005
Break all sharp edges



This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.