


# Captive Screw Type 3 1/4-20 Thread - 3/4 Head Diameter

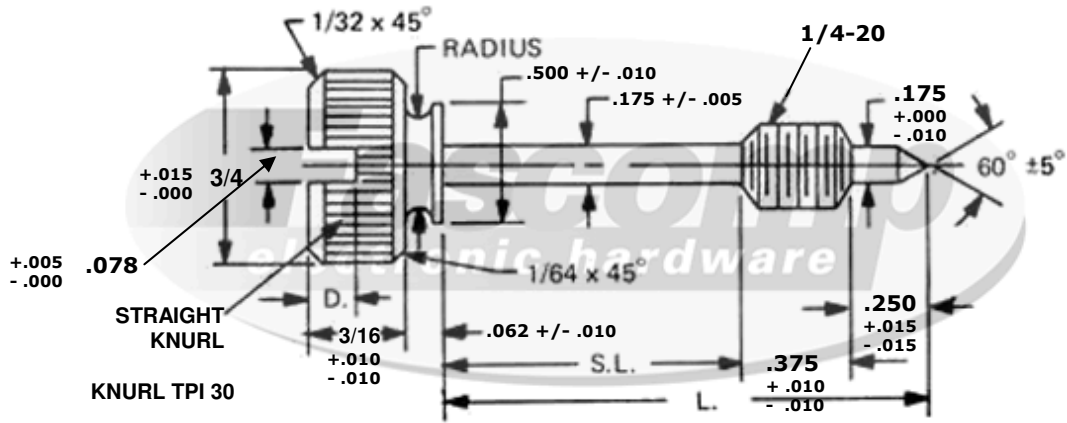

Create a part number:

| Length                | Material | Finish |
|-----------------------|----------|--------|
| FCXXXX                | XX       | XX     |
| _____ - _____ - _____ |          |        |

| Captive Screws - 1/4-20 Thread |        |            |                        |                     |
|--------------------------------|--------|------------|------------------------|---------------------|
| ✓                              | FCXXXX | Length (L) | S.L.<br>+.010<br>-.010 | D<br>+.010<br>-.000 |
|                                | FC0748 | 3/4        | 1/8                    | .125                |
|                                | FC0749 | 13/16      | 3/16                   | .125                |
|                                | FC0750 | 7/8        | 1/4                    | .125                |
|                                | FC0751 | 15/16      | 5/16                   | .125                |
|                                | FC0752 | 1          | 3/8                    | .125                |
|                                | FC0753 | 1-1/16     | 7/16                   | .125                |
|                                | FC0754 | 1-1/8      | 1/2                    | .125                |
|                                | FC0755 | 1-3/16     | 9/16                   | .125                |
|                                | FC0756 | 1-1/4      | 5/8                    | .125                |
|                                | FC0757 | 1-5/16     | 11/16                  | .125                |
|                                | FC0758 | 1-3/8      | 3/4                    | .125                |
|                                | FC0759 | 1-7/16     | 13/16                  | .125                |
|                                | FC0760 | 1-1/2      | 7/8                    | .125                |
|                                | FC0761 | 1-9/16     | 15/16                  | .125                |
|                                | FC0762 | 1-5/8      | 1                      | .125                |
|                                | FC0763 | 1-11/16    | 1-1/16                 | .125                |
|                                | FC0764 | 1-3/4      | 1-1/8                  | .125                |

| Material             |                 |
|----------------------|-----------------|
| ✓ Material Code (XX) |                 |
| B                    | Brass           |
| S                    | Steel           |
| SS                   | Stainless Steel |

| ✓ Compatible Finish (XX) |                                       |  |
|--------------------------|---------------------------------------|--|
| B, S, SS                 | 0 - Plain                             |  |
| B, S                     | 5 - Nickel Plate (QQ-N-290)           |  |
| B, S                     | 12 - Zinc Clear (ASTM-B-633)          |  |
| B, S                     | 16 - Electro Tin (MIL-T-10727 TYPE 1) |  |
| SS                       | 20 - Passivation (MIL-F-14072D)       |  |
| B, S, SS                 | 26 - Black Oxide                      |  |
| B, S                     | 28 - Zinc Yellow (ASTM-B-633)         |  |

**Tolerances**  
**Unless otherwise Specified**  
 .xxx +/- .005  
 .xx +/- .010  
 Angular +/- 1 Degree  
 Linear +/- .005  
**Break all sharp edges**

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.



Source Control Drawing:  
 To be produced by  
 Fascomp Electronic Hardware