


Captive Screw Type 3 1/4-28 Thread - 3/4 Head Diameter

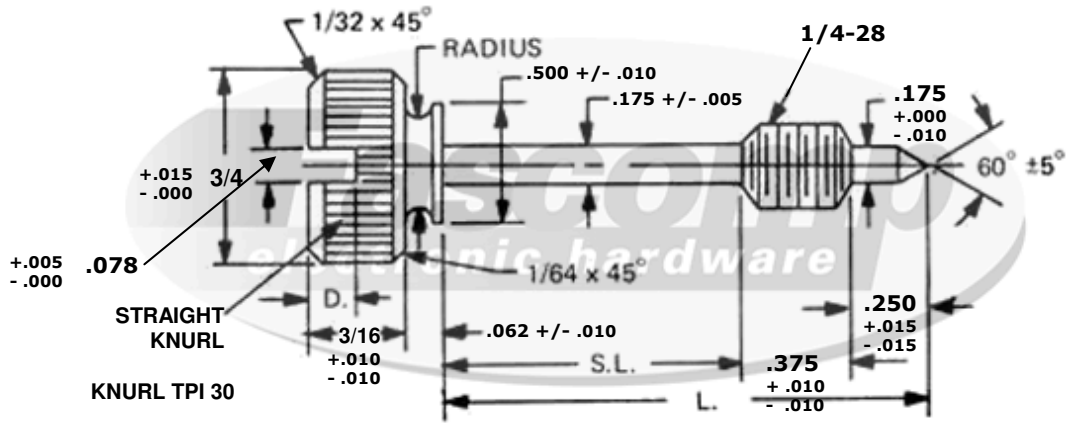

Create a part number:

Length	Material	Finish
FCXXXX	XX	XX
_____ - _____ - _____		

Captive Screws - 1/4-28 Thread				
✓	FCXXXX	Length (L)	S.L. + .010 - .010	D + .010 - .000
	FC0782	3/4	1/8	.125
	FC0783	13/16	3/16	.125
	FC0784	7/8	1/4	.125
	FC0785	15/16	5/16	.125
	FC0786	1	3/8	.125
	FC0787	1-1/16	7/16	.125
	FC0788	1-1/8	1/2	.125
	FC0790	1-3/16	9/16	.125
	FC0790	1-1/4	5/8	.125
	FC0791	1-5/16	11/16	.125
	FC0792	1-3/8	3/4	.125
	FC0793	1-7/16	13/16	.125
	FC0794	1-1/2	7/8	.125
	FC0795	1-9/16	15/16	.125
	FC0796	1-5/8	1	.125
	FC0797	1-11/16	1-1/16	.125
	FC0798	1-3/4	1-1/8	.125

Material	
✓ Material Code (XX)	
B	Brass
S	Steel
SS	Stainless Steel

✓ Compatible Finish (XX)	
B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)

Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware