


# Captive Screw Type 3 6-32 Thread

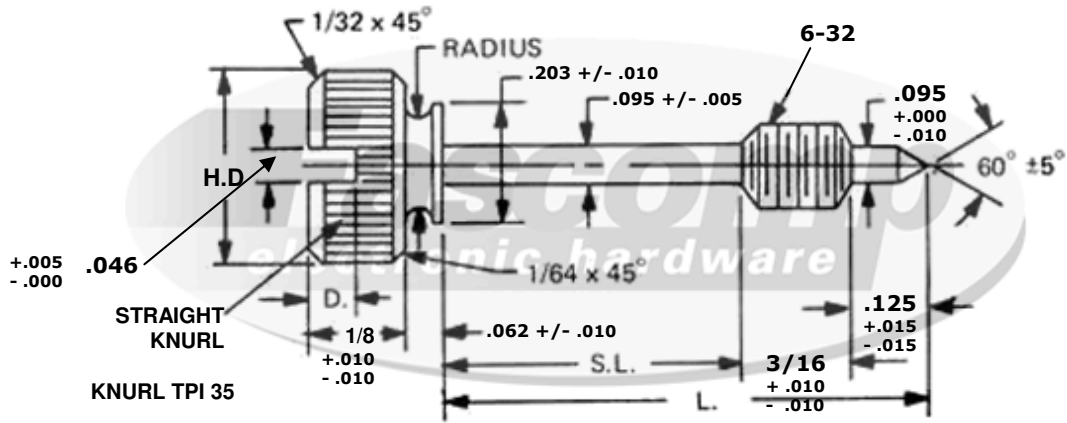

Create a part number:

Length	Material	Finish
FCXXXX	XX	XX

Captive Screws - 6-32 Thread					
FCXXXX	Length (L)	H.D. + .015 - .000	S.L. +/- .010	D + .010 - .000	
FC0586	1/2	5/16	3/16	.062	
FC0587	9/16	5/16	1/4	.062	
FC0588	5/8	5/16	5/16	.062	
FC0589	11/16	5/16	3/8	.062	
FC0590	3/4	5/16	7/16	.062	
FC0591	13/16	5/16	1/2	.062	
FC0592	7/8	5/16	9/16	.062	
FC0593	15/16	5/16	5/8	.062	
FC0594	1	5/16	11/16	.062	
FC0595	1-1/16	5/16	3/4	.062	
FC0596	1-1/8	5/16	13/16	.062	
FC0597	1-3/16	5/16	7/8	.062	
FC0598	1-1/4	5/16	15/16	.062	
FC0599	1/2	3/8	3/16	.062	
FC0600	9/16	3/8	1/4	.062	
FC0601	5/8	3/8	5/16	.062	
FC0602	11/16	3/8	3/8	.062	
FC0603	3/4	3/8	7/16	.062	
FC0604	13/16	3/8	1/2	.062	
FC0605	7/8	3/8	9/16	.062	
FC0606	15/16	3/8	5/8	.062	
FC0607	1	3/8	11/16	.062	
FC0608	1-1/16	3/8	3/4	.062	
FC0609	1-1/8	3/8	13/16	.062	
FC0610	1-3/16	3/8	7/8	.062	
FC0611	1-1/4	3/8	15/16	.062	

Material	
Material Code (XX)	
B	Brass
S	Steel
SS	Stainless Steel

Compatible Finish (XX)	
B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)

Source Control Drawing:  
To be produced by  
Fascomp Electronic Hardware

**Tolerances Unless otherwise Specified**  
 .xxx +/- .005  
 .xx +/- .010  
 Angular +/- 1 Degree  
 Linear +/- .005  
**Break all sharp edges**



This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.