


Captive Screw Type 4 10-24 Thread

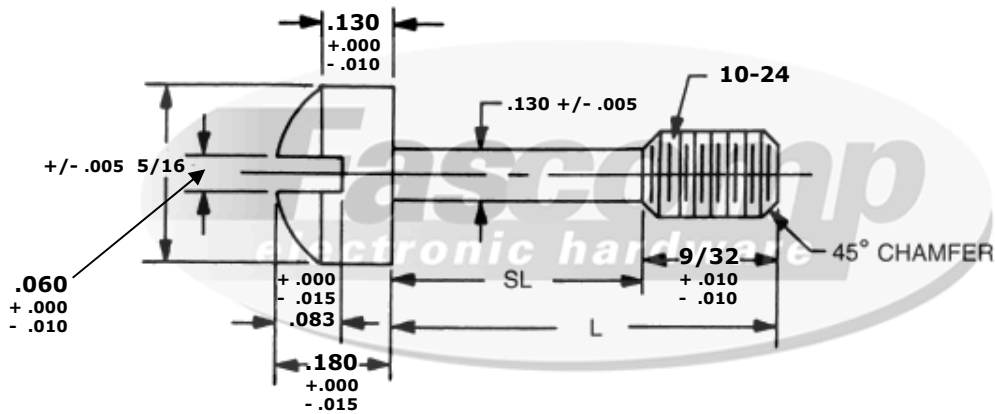

Create a part number:

Length	Material	Finish
FCXXXX	XX	XX
<hr style="border: none; border-top: 1px dashed black;"/>		

Captive Screws - 10-24 Thread			
	FCXXXX	Length (L)	S.L. +/- .010
✓	FC0858	3/8	3/32
	FC0859	7/16	5/32
	FC0860	1/2	7/32
	FC0861	9/16	9/32
	FC0862	5/8	11/32
	FC0863	11/16	13/32
	FC0864	3/4	15/32
	FC0865	13/16	17/32
	FC0866	7/8	19/32
	FC0867	15/16	21/32
	FC0868	1	23/32
	FC0869	1-1/16	25/32
	FC0870	1-1/8	27/32
	FC0871	1-3/16	29/32
	FC0872	1-1/4	31/32
	FC0873	1-5/16	1-1/32
	FC0874	1-3/8	1-3/32
	FC0875	1-7/16	1-5/32
	FC0876	1-1/2	1-7/32

Material		
	Material Code (XX)	
✓	B	Brass
	S	Steel
	SS	Stainless Steel

	Compatible Finish (XX)	
✓	B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)

Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware



This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.