


Captive Screw Type 5 10-24 Thread

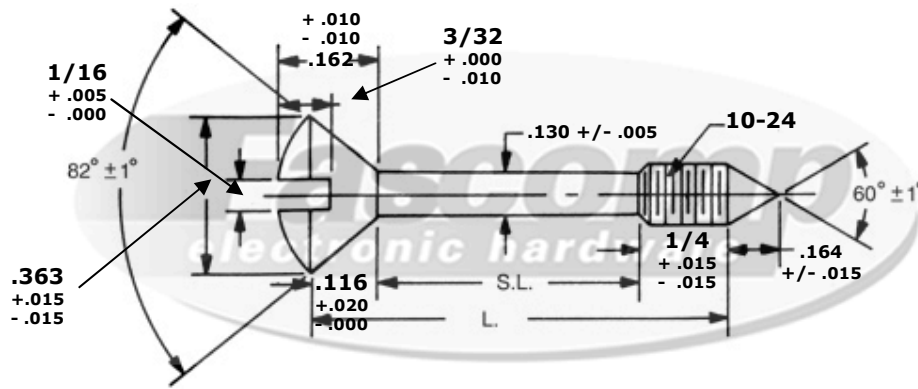

Create a part number:

Length	Material	Finish
FCXXXX	XX	XX

Captive Screws - 10-32 Thread			
✓ FCXXXX	Length (L)	S.L. REF	
FC0943	1/2	1.8	
FC0944	9/16	3/16	
FC0945	5/8	1/4	
FC0946	11/16	5/16	
FC0947	3/4	3/8	
FC0948	13/16	7/16	
FC0949	7/8	1/2	
FC0950	15/16	9/16	
FC0951	1	5/8	
FC0952	1-1/16	11/16	
FC0953	1-1/8	3/4	
FC0954	1-3/16	13/16	
FC0955	1-1/4	7/8	
FC0956	1-5/16	15/16	
FC0957	1-3/8	1	
FC0958	1-7/16	1-1/16	
FC0959	1-1/2	1-1/8	
FC0960	1-9/16	1-3/16	
FC0961	1-5/8	1-1/4	
FC0962	1-11/16	1-5/16	
FC0963	1-3/4	1-3/8	
FC0964	1-13/16	1-7/16	
FC0965	1-7/8	1-1/2	
FC0966	1-15/16	1-9/16	
FC0967	2	1-5/8	

Material		
✓ Material Code (XX)		
B	Brass	
S	Steel	
SS	Stainless Steel	

✓ Compatible Finish (XX)		
B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	

Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

Tolerances
Unless otherwise Specified
.xxx +/- .005
.xx +/- .010
Angular +/- 1 Degree
Linear +/- .005
Break all sharp edges



This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.