


Captive Screw Type 5 Washers

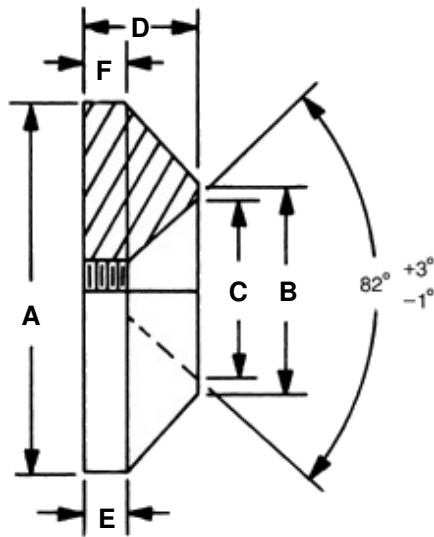

Create a part number:

Length	Material	Finish
FCXXXX	XX	XX

Captive Screws - Washers

✓	FCXXXX	Thread	A + .005 - .005	B + .005 - .005	C + .005 - .005	D + .000 - .010	E + .005 - .005	F + .012 - .012
	FC0993	4-40	3/8	.265	.234	.156	1/64	.062
	FC0994	6-32	7/16	.328	.296	.171	1/32	.078
	FC0995	8-32	9/16	.375	.343	.203	1/32	.078
	FC0996	10-24	5/8	.421	.390	.218	1/32	.078
	FC0997	10-32	5/8	.421	.390	.218	1/32	.078

Material

✓	Material Code (XX)	
	B	Brass
	S	Steel
	SS	Stainless Steel

Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓ Compatible Finish (XX)

B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)

Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware



This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.