


Hex Code Table		
✓	FCXXXX	Length (L)
	FC2999	1/8
	FC2300	3/16
	FC2301	1/4
	FC2302	5/16
	FC2303	3/8
	FC2304	7/16
	FC2305	1/2
	FC2306	9/16
	FC2307	5/8
	FC2308	11/16
	FC2309	3/4
	FC2310	13/16
	FC2311	7/8
	FC2312	15/16
	FC2313	1
	FC2314	1-1/16
	FC2315	1-1/8
	FC2316	1-3/16
	FC2317	1-1/4
	FC2318	1-5/16
	FC2319	1-3/8
	FC2320	1-7/16
	FC2321	1-1/2
	FC2322	1-9/16
	FC2323	1-5/8
	FC2324	1-11/16
	FC2325	1-3/4
	FC2326	1-13/16
	FC2327	1-7/8
	FC2328	1-15/16
	FC2329	2
	FC2330	2-1/8
	FC2331	2-1/4
	FC2332	2-3/8
	FC2333	2-1/2
	FC2334	2-5/8
	FC2335	2-3/4
	FC2336	2-7/8
	FC2337	3
	FC2338	3-1/4
	FC2339	3-1/2
	FC2340	3-3/4
	FC2341	4
	FC2342	4-1/4
	FC2343	4-1/2
	FC2344	4-3/4
	FC2345	5
	FC2346	5-1/4
	FC2347	5-1/2
	FC2348	5-3/4
	FC2349	6

1/2 Hex Female Standoff

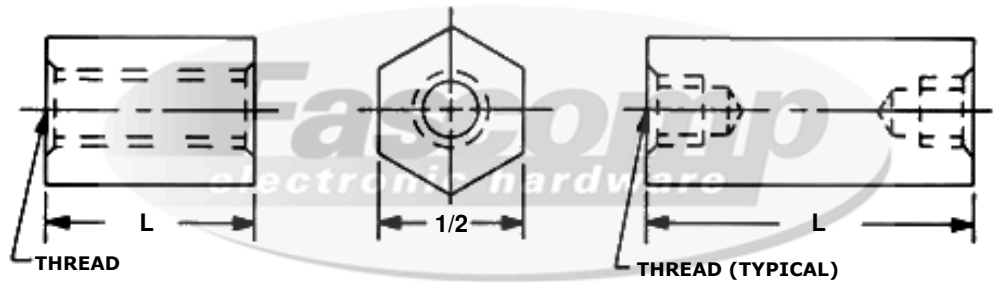

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread				
✓ Thread Code (XXX)	Tapped Thru		Longer Parts	
	A, B, S	SS	Blind Tap Depth	
632	1	1	3/8	
832	1	1	7/16	
1032	1-1/8	1	1/2	
1224	1-1/8	1	1/2	
2520	1-1/4	1-1/4	5/8	

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel
	N	Nylon

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

Compatible Finish		
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.