


1/8 Hex Female Standoff

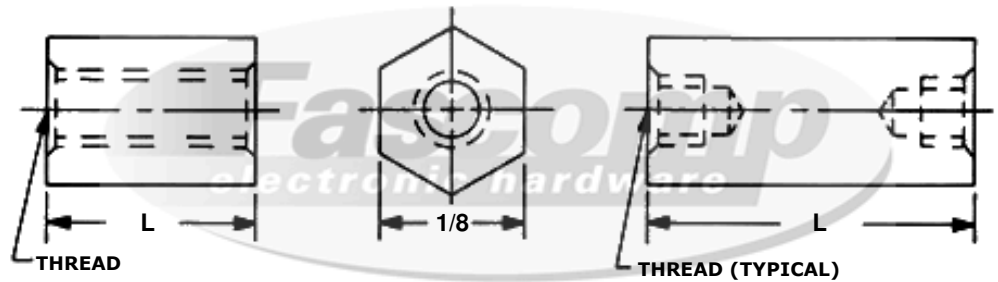

Hex Code Table		
✓	FCXXXX	Length (L)
	FC2020	1/8
	FC2021	3/16
	FC2022	1/4
	FC2023	5/16
	FC2024	3/8
	FC2025	7/16
	FC2026	1/2
	FC2027	9/16
	FC2028	5/8
	FC2029	11/16
	FC2030	3/4
	FC2031	13/16
	FC2032	7/8
	FC2033	15/16
	FC2034	1
	FC2035	1-1/16
	FC2036	1-1/8
	FC2037	1-3/16
	FC2038	1-1/4
	FC2039	1-5/16
	FC2040	1-3/8
	FC2041	1-7/16
	FC2042	1-1/2
	FC2043	1-9/16
	FC2044	1-5/8
	FC2045	1-11/16
	FC2046	1-3/4
	FC2047	1-13/16
	FC2048	1-7/8
	FC2049	1-15/16
	FC2050	2

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
<hr style="border: none; border-top: 1px solid black; margin: 5px 0;"/> - <hr style="border: none; border-top: 1px solid black; margin: 5px 0;"/> - <hr style="border: none; border-top: 1px solid black; margin: 5px 0;"/> - <hr style="border: none; border-top: 1px solid black; margin: 5px 0;"/>			

Thread				
✓	Thread Code (XXX)	Tapped Thru		Longer Parts
		A, B, S	SS	Blind Tap Depth
	080	3/8	1/4	3/16
	256	3/4	5/8	3/16

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel
	N	Nylon

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓ Compatible Finish		
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.