


Hex Code Table		
✓	FCXXXX	Length (L)
	FC2232	1/8
	FC2233	3/16
	FC2234	1/4
	FC2235	5/16
	FC2236	3/8
	FC2237	7/16
	FC2238	1/2
	FC2239	9/16
	FC2240	5/8
	FC2241	11/16
	FC2242	3/4
	FC2243	13/16
	FC2244	7/8
	FC2245	15/16
	FC2246	1
	FC2247	1-1/16
	FC2248	1-1/8
	FC2249	1-3/16
	FC2250	1-1/4
	FC2251	1-5/16
	FC2252	1-3/8
	FC2253	1-7/16
	FC2254	1-1/2
	FC2255	1-9/16
	FC2256	1-5/8
	FC2257	1-11/16
	FC2258	1-3/4
	FC2259	1-13/16
	FC2260	1-7/8
	FC2261	1-15/16
	FC2262	2
	FC2263	2-1/8
	FC2264	2-1/4
	FC2265	2-3/8
	FC2266	2-1/2
	FC2267	2-5/8
	FC2268	2-3/4
	FC2269	2-7/8
	FC2270	3
	FC2271	3-1/4
	FC2272	3-1/2
	FC2273	3-3/4
	FC2274	4
	FC2275	4-1/4
	FC2276	4-1/2
	FC2277	4-3/4
	FC2278	5
	FC2279	5-1/4
	FC2280	5-1/2
	FC2281	5-3/4
	FC2282	6

3/8 Hex Female Standoff

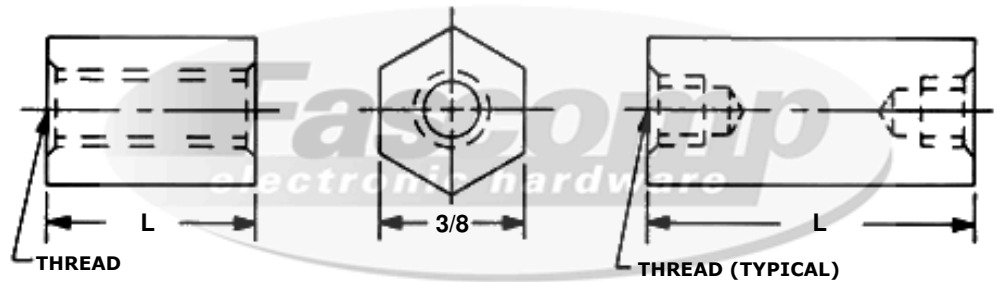

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

✓	Thread			
	Thread Code	Tapped Thru		Longer Parts
	(XXX)	A, B, S	SS	Blind Tap Depth
	632	1	1	3/8
	832	1	1	7/16
	1032	1-1/8	1	1/2
	1224	1-1/8	1	1/2
	2520	1-1/4	1/1-4	5/8

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material	
✓	Material Code (XX)
	A Aluminum
	B Brass
	S Steel
	SS Stainless Steel
	N Nylon

Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓	Compatible Finish	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.