


5/16 Hex Female Standoff

Hex Code Table	
FCXXXX	Length (L)
FC2165	1/8
FC2166	3/16
FC2167	1/4
FC2168	5/16
FC2169	3/8
FC2170	7/16
FC2171	1/2
FC2172	9/16
FC2173	5/8
FC2174	11/16
FC2175	3/4
FC2176	13/16
FC2177	7/8
FC2178	15/16
FC2179	1
FC2180	1-1/16
FC2181	1-1/8
FC2182	1-3/16
FC2183	1-1/4
FC2184	1-5/16
FC2185	1-3/8
FC2186	1-7/16
FC2187	1-1/2
FC2188	1-9/16
FC2189	1-5/8
FC2190	1-11/16
FC2191	1-3/4
FC2192	1-13/16
FC2193	1-7/8
FC2194	1-15/16
FC2195	2
FC2196	2-1/8
FC2197	2-1/4
FC2198	2-3/8
FC2199	2-1/2
FC2200	2-5/8
FC2201	2-3/4
FC2202	2-7/8
FC2203	3
FC2204	3-1/4
FC2205	3-1/2
FC2206	3-3/4
FC2207	4
FC2208	4-1/4
FC2209	4-1/2
FC2210	4-3/4
FC2211	5
FC2212	5-1/4
FC2213	5-1/2
FC2214	5-3/4
FC2215	6

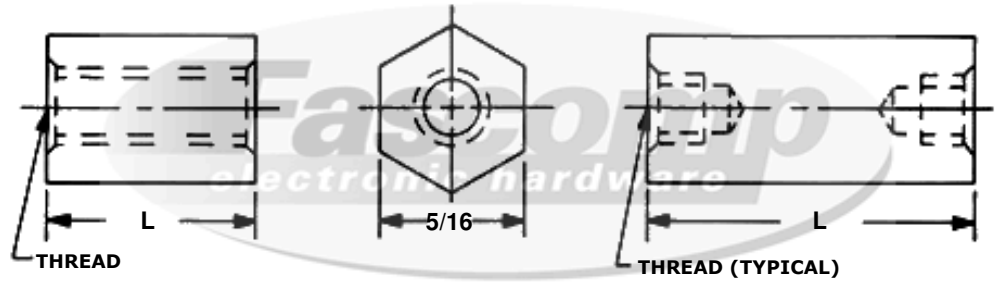

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

	Thread			
	Thread Code (XXX)	Tapped Thru		Longer Parts
		A, B, S	SS	Blind Tap Depth
✓	440	1	3/4	1/4
	632	1	1	3/8
	832	1	1	7/16
	1032	1-1/8	1	1/2

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material	
✓	Material Code (XX)
	A Aluminum
	B Brass
	S Steel
	SS Stainless Steel
	N Nylon

Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

Compatible Finish	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.