


5/8 Hex Female Standoff

Hex Code Table	
✓ FCXXXX	Length (L)
FC2366	1/8
FC2367	3/16
FC2368	1/4
FC2369	5/16
FC2370	3/8
FC2371	7/16
FC2372	1/2
FC2373	9/16
FC2374	5/8
FC2375	11/16
FC2376	3/4
FC2377	13/16
FC2378	7/8
FC2379	15/16
FC2380	1
FC2381	1-1/16
FC2382	1-1/8
FC2383	1-3/16
FC2384	1-1/4
FC2385	1-5/16
FC2386	1-3/8
FC2387	1-7/16
FC2388	1-1/2
FC2389	1-9/16
FC2390	1-5/8
FC2391	1-11/16
FC2392	1-3/4
FC2393	1-13/16
FC2394	1-7/8
FC2395	1-15/16
FC2396	2
FC2397	2-1/8
FC2398	2-1/4
FC2399	2-3/8
FC2400	2-1/2
FC2401	2-5/8
FC2402	2-3/4
FC2403	2-7/8
FC2404	3
FC2405	3-1/4
FC2406	3-1/2
FC2407	3-3/4
FC2408	4
FC2409	4-1/4
FC2410	4-1/2
FC2411	4-3/4
FC2412	5
FC2413	5-1/4
FC2414	5-1/2
FC2415	5-3/4
FC2416	6

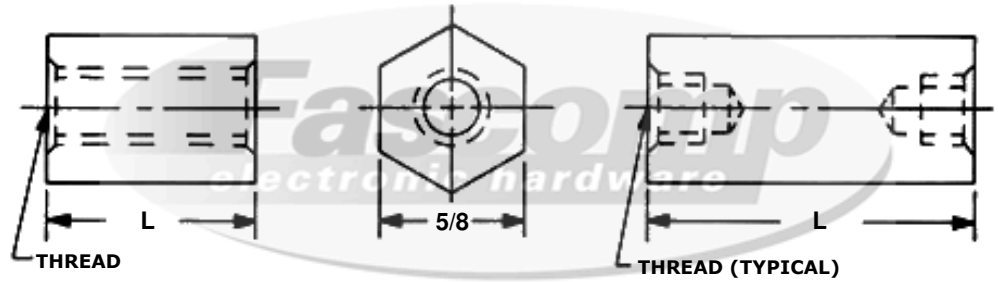

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread			
✓ Thread Code (XXX)	Tapped Thru		Longer Parts
	A, B, S	SS	Blind Tap Depth
832	1	1	7/16
1032	1-1/8	1	1/2
1224	1-1/8	1	1/2
2520	1-1/4	1-1/4	5/8

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material	
✓ Material Code (XX)	
A	Aluminum
B	Brass
S	Steel
SS	Stainless Steel
N	Nylon

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓ Compatible Finish	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.