


1/2 Round Female Standoff

Hex Code Table	
FCXXX	Length (L)
FC1879	1/8
FC1880	3/16
FC1881	1/4
FC1882	5/16
FC1883	3/8
FC1884	7/16
FC1885	1/2
FC1886	9/16
FC1887	5/8
FC1888	11/16
FC1889	3/4
FC1890	13/16
FC1891	7/8
FC1892	15/16
FC1893	1
FC1894	1-1/16
FC1895	1-1/8
FC1896	1-3/16
FC1897	1-1/4
FC1898	1-5/16
FC1899	1-3/8
FC1900	1-7/16
FC1901	1-1/2
FC1902	1-9/16
FC1903	1-5/8
FC1904	1-11/16
FC1905	1-3/4
FC1906	1-13/16
FC1907	1-7/8
FC1908	1-15/16
FC1909	2
FC1910	2-1/8
FC1911	2-1/4
FC1912	2-3/8
FC1913	2-1/2
FC1914	2-5/8
FC1915	2-3/4
FC1916	2-7/8
FC1917	3
FC1918	3-1/4
FC1919	3-1/2
FC1920	3-3/4
FC1921	4
FC1922	4-1/4
FC1923	4-1/2
FC1924	4-3/4
FC1925	5
FC1926	5-1/4
FC1927	5-1/2
FC1928	5-3/4
FC1929	6

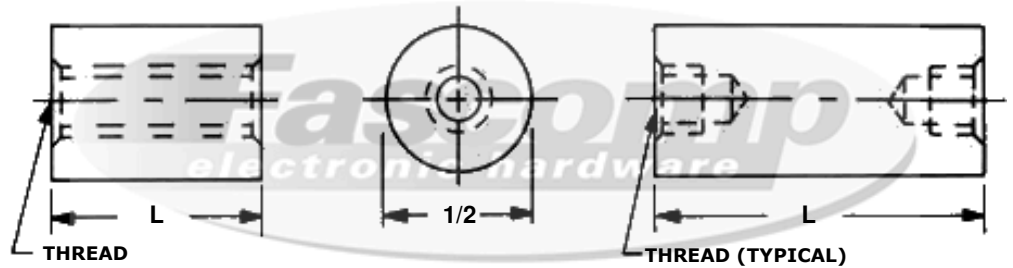

Create a part number:

Length	Thread	Material	Finish
FCXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

✓	Thread			
	Thread Code (XXX)	Tapped Thru		Longer Parts
		A, B, S	SS	Blind Tap Depth
	632	1	1	3/8
	832	1	1	7/16
	1032	1-1/8	1	1/2
	1224	1-1/8	1	1/2
	2520	1-1/4	1-1/4	5/8

Material	
✓	Material Code (XX)
A	Aluminum
B	Brass
S	Steel
SS	Stainless Steel
N	Nylon

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓	Compatible Finish	
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.