


1/4 Round Female Standoff

Hex Code Table	
FCXXXX	Length (L)
FC1678	1/8
FC1679	3/16
FC1680	1/4
FC1681	5/16
FC1682	3/8
FC1683	7/16
FC1684	1/2
FC1685	9/16
FC1686	5/8
FC1687	11/16
FC1688	3/4
FC1689	13/16
FC1690	7/8
FC1691	15/16
FC1692	1
FC1693	1-1/16
FC1694	1-1/8
FC1695	1-3/16
FC1696	1-1/4
FC1697	1-5/16
FC1698	1-3/8
FC1699	1-7/16
FC1700	1-1/2
FC1701	1-9/16
FC1702	1-5/8
FC1703	1-11/16
FC1704	1-3/4
FC1705	1-13/16
FC1706	1-7/8
FC1707	1-15/16
FC1708	2
FC1709	2-1/8
FC1710	2-1/4
FC1711	2-3/8
FC1712	2-1/2
FC1713	2-5/8
FC1714	2-3/4
FC1715	2-7/8
FC1716	3
FC1717	3-1/4
FC1718	3-1/2
FC1719	3-3/4
FC1720	4
FC1721	4-1/4
FC1722	4-1/2
FC1723	4-3/4
FC1724	5
FC1725	5-1/4
FC1726	5-1/2
FC1727	5-3/4
FC1728	6

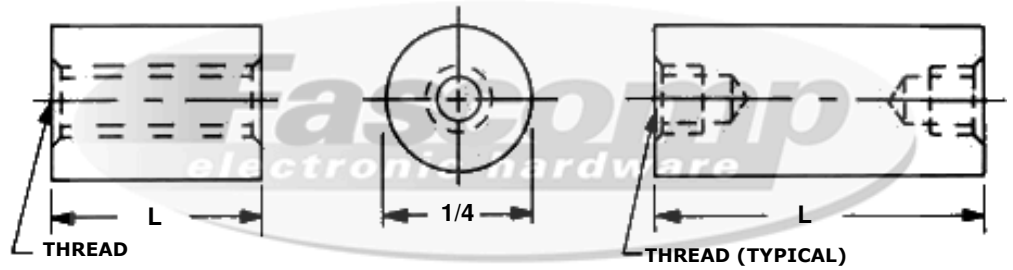

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

	Thread			
	Thread Code (XXX)	Tapped Thru		Longer Parts
		A, B, S	SS	Blind Tap Depth
✓	440	1	3/4	1/4
	632	1	1	3/8
	832	1	1	7/16
	1032	1-1/8	1	1/2

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

✓	Material	
	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel
	N	Nylon

Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓	Compatible Finish	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.