


# 1/8 Round Female Standoff

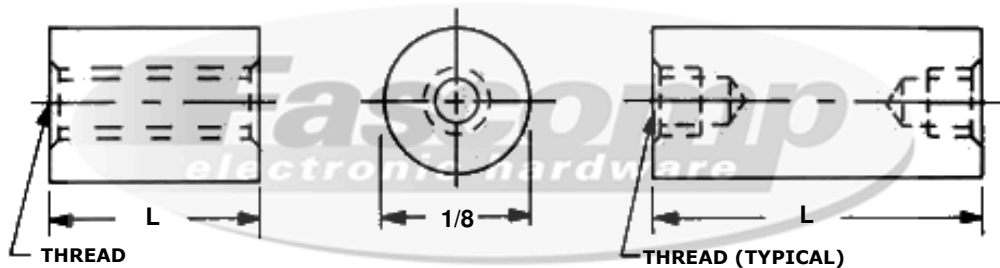

| Hex Code Table |            |
|----------------|------------|
| ✓ FCXXXX       | Length (L) |
| FC1600         | 1/8        |
| FC1601         | 3/16       |
| FC1602         | 1/4        |
| FC1603         | 5/16       |
| FC1604         | 3/8        |
| FC1605         | 7/16       |
| FC1606         | 1/2        |
| FC1607         | 9/16       |
| FC1608         | 5/8        |
| FC1609         | 11/16      |
| FC1610         | 3/4        |
| FC1611         | 13/16      |
| FC1612         | 7/8        |
| FC1613         | 15/16      |
| FC1614         | 1          |
| FC1615         | 1-1/16     |
| FC1616         | 1-1/8      |
| FC1617         | 1-3/16     |
| FC1618         | 1-1/4      |
| FC1619         | 1-5/16     |
| FC1620         | 1-3/8      |
| FC1621         | 1-7/16     |
| FC1622         | 1-1/2      |
| FC1623         | 1-9/16     |
| FC1624         | 1-5/8      |
| FC1625         | 1-11/16    |
| FC1626         | 1-3/4      |
| FC1627         | 1-13/16    |
| FC1628         | 1-7/8      |
| FC1629         | 1-15/16    |
| FC1630         | 2          |

**Create a part number:**

| Length   | Thread | Material | Finish |
|--|--------|----------|--------|
| FCXXXX   | XXX    | XX       | XX     |
| <div style="border-bottom: 1px solid black; width: 100%;"></div> |        |          |        |

| Thread              |             |     |                 |
|---------------------|-------------|-----|-----------------|
| ✓ Thread Code (XXX) | Tapped Thru |     | Longer Parts    |
|                     | A, B, S     | SS  | Blind Tap Depth |
| 080                 | 3/8         | 1/4 | 3/16            |
| 256                 | 3/4         | 5/8 | 3/16            |

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

| Material             |                 |
|----------------------|-----------------|
| ✓ Material Code (XX) |                 |
| A                    | Aluminum        |
| B                    | Brass           |
| S                    | Steel           |
| SS                   | Stainless Steel |
| N                    | Nylon           |

**Tolerances Unless otherwise Specified**  
 .xxx +/- .005  
 .xx +/- .010  
 Angular +/- 1 Degree  
 Linear +/- .005  
**Break all sharp edges**

| ✓ Compatible Finish |  |
|---------------------|--|
| A, B, S, SS         | 0 - Plain  |
| B, S                | 5 - Nickel Plate (QQ-N-290)  |
| A                   | 6 - Iridite #14 Gold (MIL-C-5541E)                                       |
| A                   | 7 - Iridite Clear (MIL-C-5541E)  |
| A                   | 9 - Alodine 1200   |
| B, S                | 12 - Zinc Clear (ASTM-B-633)   |
| B, S                | 16 - Electro Tin (MIL-T-10727 TYPE 1)                                    |
| SS                  | 20 - Passivation (MIL-F-14072D)  |
| A                   | 22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear) |
| A                   | 24 - Black Anodize (MIL-A-8625)  |
| B, S, SS            | 26 - Black Oxide   |
| B, S                | 28 - Zinc Yellow (ASTM-B-633)  |



Source Control Drawing:  
 To be produced by  
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.