


3/8 Round Female Standoff

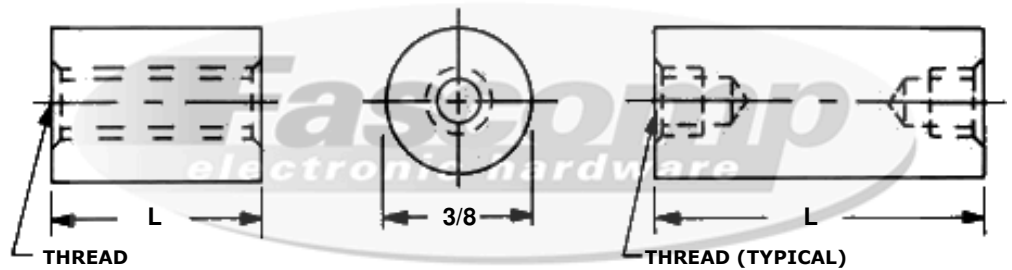

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Hex Code Table	
✓ FCXXXX	Length (L)
FC1812	1/8
FC1813	3/16
FC1814	1/4
FC1815	5/16
FC1816	3/8
FC1817	7/16
FC1818	1/2
FC1819	9/16
FC1820	5/8
FC1821	11/16
FC1822	3/4
FC1823	13/16
FC1824	7/8
FC1825	15/16
FC1826	1
FC1827	1-1/16
FC1828	1-1/8
FC1829	1-3/16
FC1830	1-1/4
FC1831	1-5/16
FC1832	1-3/8
FC1833	1-7/16
FC1834	1-1/2
FC1835	1-9/16
FC1836	1-5/8
FC1837	1-11/16
FC1838	1-3/4
FC1839	1-13/16
FC1840	1-7/8
FC1841	1-15/16
FC1842	2
FC1843	2-1/8
FC1844	2-1/4
FC1845	2-3/8
FC1846	2-1/2
FC1847	2-5/8
FC1848	2-3/4
FC1849	2-7/8
FC1850	3
FC1851	3-1/4
FC1852	3-1/2
FC1853	3-3/4
FC1854	4
FC1855	4-1/4
FC1856	4-1/2
FC1857	4-3/4
FC1858	5
FC1859	5-1/4
FC1860	5-1/2
FC1861	5-3/4
FC1862	6

Thread				
✓ Thread Code (XXX)	Tapped Thru		Longer Parts	
	A, B, S	SS	Blind Tap Depth	
632	1	1	3/8	
832	1	1	7/16	
1032	1-1/8	1	1/2	
1224	1-1/8	1	1/2	
2520	1-1/4	1/1-4	5/8	

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material	
✓ Material Code (XX)	
A	Aluminum
B	Brass
S	Steel
SS	Stainless Steel
N	Nylon

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓ Compatible Finish	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.