


5/16 Round Female Standoff

Hex Code Table	
✓ FCXXXX	Length (L)
FC1745	1/8
FC1746	3/16
FC1747	1/4
FC1748	5/16
FC1749	3/8
FC1750	7/16
FC1751	1/2
FC1752	9/16
FC1753	5/8
FC1754	11/16
FC1755	3/4
FC1756	13/16
FC1757	7/8
FC1758	15/16
FC1759	1
FC1760	1-1/16
FC1761	1-1/8
FC1762	1-3/16
FC1763	1-1/4
FC1764	1-5/16
FC1765	1-3/8
FC1766	1-7/16
FC1767	1-1/2
FC1768	1-9/16
FC1769	1-5/8
FC1770	1-11/16
FC1771	1-3/4
FC1772	1-13/16
FC1773	1-7/8
FC1774	1-15/16
FC1775	2
FC1776	2-1/8
FC1777	2-1/4
FC1778	2-3/8
FC1779	2-1/2
FC1780	2-5/8
FC1781	2-3/4
FC1782	2-7/8
FC1783	3
FC1784	3-1/4
FC1785	3-1/2
FC1786	3-3/4
FC1787	4
FC1788	4-1/4
FC1789	4-1/2
FC1790	4-3/4
FC1791	5
FC1792	5-1/4
FC1793	5-1/2
FC1794	5-3/4
FC1795	6

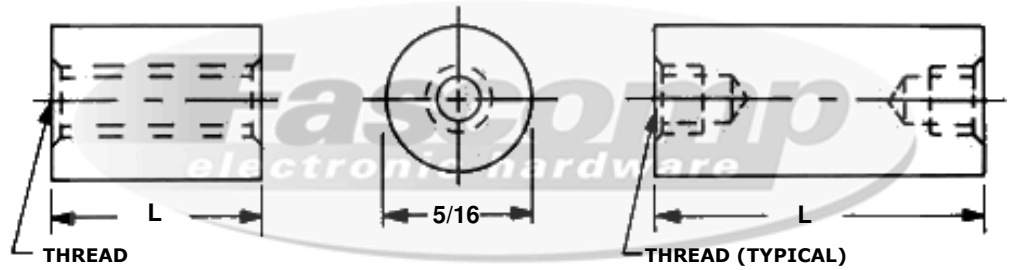

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

✓	Thread			
	Thread Code (XXX)	Tapped Thru		Longer Parts
		A, B, S	SS	Blind Tap Depth
	440	1	3/4	1/4
	632	1	1	3/8
	832	1	1	7/16
	1032	1-1/8	1	1/2

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material	
✓	Material Code (XX)
A	Aluminum
B	Brass
S	Steel
SS	Stainless Steel
N	Nylon

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓ Compatible Finish	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.