


5/8 Round Female Standoff

Hex Code Table	
✓ FCXXX	Length (L)
FC1946	1/8
FC1947	3/16
FC1948	1/4
FC1949	5/16
FC1950	3/8
FC1951	7/16
FC1952	1/2
FC1953	9/16
FC1954	5/8
FC1955	11/16
FC1956	3/4
FC1957	13/16
FC1958	7/8
FC1959	15/16
FC1960	1
FC1961	1-1/16
FC1962	1-1/8
FC1963	1-3/16
FC1964	1-1/4
FC1965	1-5/16
FC1966	1-3/8
FC1967	1-7/16
FC1968	1-1/2
FC1969	1-9/16
FC1990	1-5/8
FC1971	1-11/16
FC1972	1-3/4
FC1973	1-13/16
FC1974	1-7/8
FC1975	1-15/16
FC1976	2
FC1977	2-1/8
FC1978	2-1/4
FC1979	2-3/8
FC1980	2-1/2
FC1981	2-5/8
FC1982	2-3/4
FC1983	2-7/8
FC1984	3
FC1985	3-1/4
FC1986	3-1/2
FC1987	3-3/4
FC1988	4
FC1989	4-1/4
FC1990	4-1/2
FC1991	4-3/4
FC1992	5
FC1993	5-1/4
FC1994	5-1/2
FC1995	5-3/4
FC1996	6

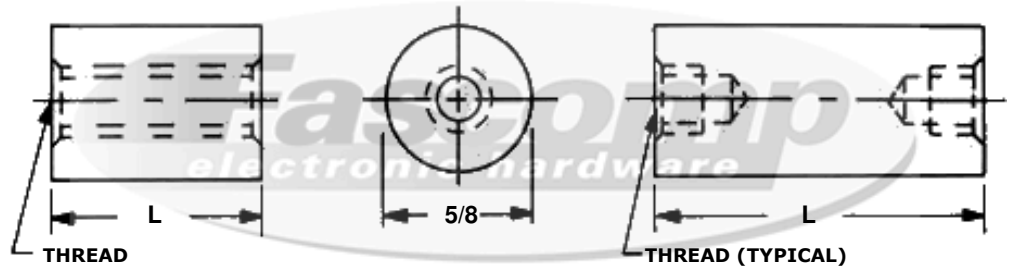

Create a part number:

Length	Thread	Material	Finish
FCXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread			
✓ Thread Code (XXX)	Tapped Thru		Longer Parts
	A, B, S	SS	Blind Tap Depth
832	1	1	7/16
1032	1-1/8	1	1/2
1224	1-1/8	1	1/2
2520	1-1/4	1-1/4	5/8

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material	
✓ Material Code (XX)	
A	Aluminum
B	Brass
S	Steel
SS	Stainless Steel
N	Nylon

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓ Compatible Finish	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.