




Ferrules Type 6

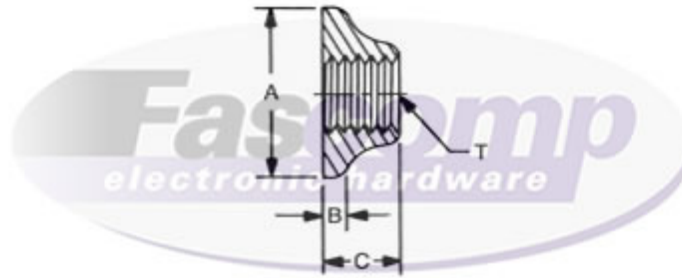

Create a part number:

Length	Material	Finish
FCXXXX	XX	XX
_____ - _____ - _____		

Part Number					
✓	FCXXXX	A +.005 -.005	B +.005 -.005	C +.005 -.005	T Thread
	FC8998	5/8	1/32	.250	5/16-18
	FC8999	3/4	1/16	.312	3/8-24

Material	
✓	Material Code (XX)
A	Aluminum
B	Brass
S	Steel
SS	Stainless Steel

Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓	Compatible Finish	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the
 property of Fascomp Inc. and shall not be
 reproduced, distributed or used as a basis
 for manufacturing without written
 permission from Fascomp Inc.