


5/8 x 9/32 Oval Internal Thread Handles

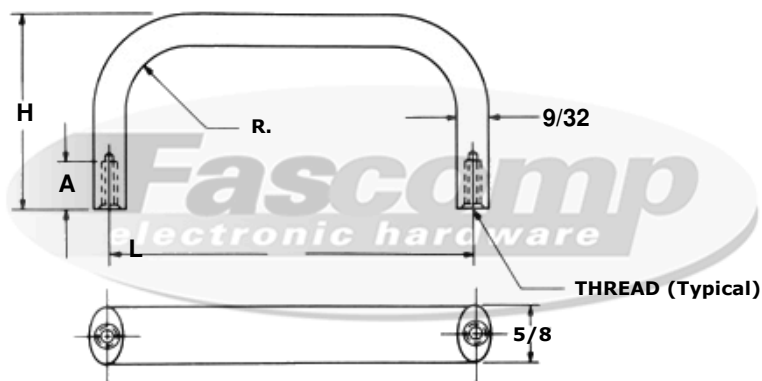

FCXXX	Length (L) +/- .031	Leg Height (H) +/- .031
FC8348	2-1/2	1
FC8349	3	1
FC8350	4	1
FC8351	4-1/4	1
FC8352	4-1/2	1
FC8353	4-9/16	1
FC8354	5	1
FC8355	6	1
FC8356	6-7/16	1
FC8357	2-1/2	1-9/32
FC8358	3	1-9/32
FC8359	4	1-9/32
FC8360	4-1/4	1-9/32
FC8361	4-1/2	1-9/32
FC8362	4-9/16	1-9/32
FC8363	5	1-9/32
FC8364	6	1-9/32
FC8365	6-7/16	1-9/32
FC8366	2-1/2	1-1/2
FC8367	3	1-1/2
FC8368	4	1-1/2
FC8369	4-1/4	1-1/2
FC8370	4-1/2	1-1/2
FC8371	4-9/16	1-1/2
FC8372	5	1-1/2
FC8373	6	1-1/2
FC8374	6-7/16	1-1/2
FC8375	7	1-1/2
FC8376	3	1-3/4
FC8377	4	1-3/4
FC8378	4-1/4	1-3/4
FC8379	4-1/2	1-3.4
FC8380	4-9/16	1-3.4
FC8381	5	1-3.4
FC8382	5-1/2	1-3/4
FC8383	6	1-3/4
FC8384	6-7/16	1-3/4
FC8385	7	1-3/4

Create a part number:

Part	Thread	Material	Finish
FCXXX	XXX	XX	XX

Thread (A) Short lengths, 'A' tapped to maximum depth			
Code (XXX)	Thread	(A)	
832	8-32	5/8	
1024	10-24	5/16 - 5/8	
1032	10-32	5/16 - 5/8	

Material	
Material Code (XX)	
A	Aluminum
B	Brass
SS	Stainless Steel

Compatible Finish	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)

**Tolerances
Unless otherwise Specified**
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges



Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.