


7/16 x 9/32 Oval Internal Thread Handles

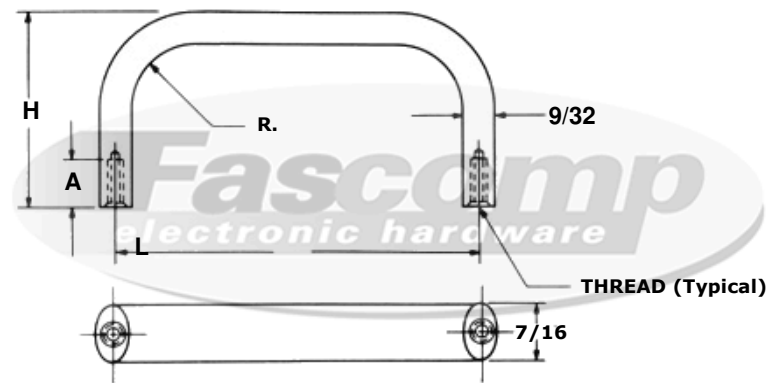

Create a part number:

✓	FCXXXX	Length (L) +/- .031	Leg Height (H) +/- .031
	FC8317	2	1
	FC8318	2-1/2	1
	FC8319	3	1
	FC8320	4	1
	FC8321	4-1/4	1
	FC8322	4-1/2	1
	FC8323	4-9/16	1
	FC8324	5	1
	FC8325	6	1
	FC8326	6-7/16	1
	FC8327	2	1-9/32
	FC8328	2-1/4	1-9/32
	FC8329	2-1/2	1-9/32
	FC8330	3	1-9/32
	FC8331	3/12	1-9/32
	FC8332	4	1-9/32
	FC8333	4-1/4	1-9/32
	FC8334	4-1/2	1-9/32
	FC8335	4-9/16	1-9/32
	FC8336	6	1-9/32
	FC8337	2	1-1/2
	FC8338	2-1/4	1-1/2
	FC8339	2-1/2	1-1/2
	FC8340	3	1-1/2
	FC8341	3-1/2	1-1/2
	FC8342	4	1-1/2
	FC8343	4-1/4	1-1/2
	FC8344	4-1/2	1-1/2
	FC8345	4-9/16	1-1/2
	FC8346	5	1-1/2
	FC8347	6	1-1/2

Part	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread (A) Short lengths, 'A' tapped to maximum depth			
✓	Code (XXX)	Thread	(A)
	832	8-32	5/16 - 1/2
	1024	10-24	5/16 - 5/8
	1032	10-32	5/16 - 5/8

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	SS	Stainless Steel

✓	Compatible Finish	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)

Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of
 Fascomp Inc. and shall not be
 reproduced, distributed or used as
 a basis for manufacturing without
 written permission from Fascomp
 Inc.