


# 3/8 Round Internal Thread Handles

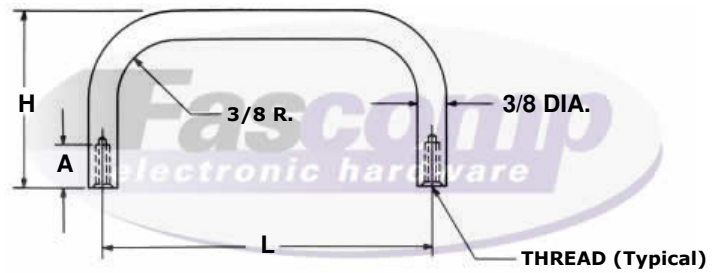

✓	FCXXXX	Length (L) +/- .031	Leg Height (H) +/- .031
	FC8214	2	1-5/16
	FC8215	3	1-5/16
	FC8216	4	1-5/16
	FC8217	5	1-5/16
	FC8218	6	1-5/16
	FC8219	7	1-5/16
	FC8220	2-1/2	1-1/2
	FC8221	3	1-1/2
	FC8222	4	1-1/2
	FC8223	4-1/4	1-1/2
	FC8224	4-1/2	1-1/2
	FC8225	5	1-1/2
	FC8226	6	1-1/2
	FC8227	7	1-1/2
	FC8228	2	1-3/4
	FC8229	2-1/2	1-3/4
	FC8230	3	1-3/4
	FC8231	3-1/2	1-3/4
	FC8232	4	1-3/4
	FC8233	4-1/4	1-3/4
	FC8234	4-1/2	1-3/4
	FC8235	5	1-3/4
	FC8236	5-1/4	1-3/4
	FC8237	5-1/2	1-3/4
	FC8238	5-3/4	1-3/4
	FC8239	6	1-3/4
	FC8240	6-1/2	1-3/4
	FC8241	7	1-3/4
	FC8242	3	1-7/8
	FC8243	4	1-7/8
	FC8244	4-1/4	1-7/8
	FC8245	4-1/2	1-7/8
	FC8246	5	1-7/8
	FC8247	6	1-7/8

**Create a part number:**

Part	Thread	Material	Finish
FCXXXX	XXX	XX	XX
<div style="border-top: 1px solid black; border-bottom: 1px solid black; width: 100%;"></div>			

Thread (A) Short lengths, 'A' tapped to maximum depth			
✓	Code (XXX)	Thread	(A)
	832	8-32	7/16
	1032	10-32	7/16 - 5/8
	2520	1/4-20	3/8 - 5/8

Material	
✓	Material Code (XX)
A	Aluminum
B	Brass
SS	Stainless Steel

✓	Compatible Finish	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)

**Tolerances  
Unless otherwise Specified**  
 .xxx +/- .005  
 .xx +/- .010  
 Angular +/- 1 Degree  
 Linear +/- .005  
**Break all sharp edges**



Source Control Drawing:  
To be produced by  
Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.