


5/16 Round Internal Thread Handles

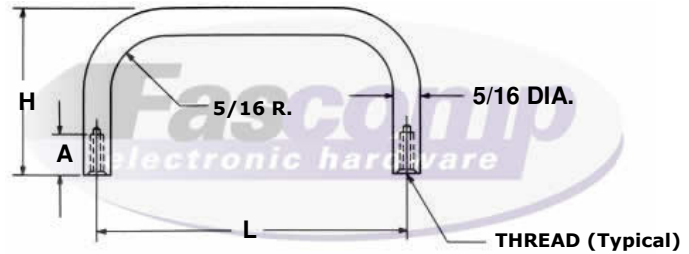

Create a part number:

Part	Thread	Material	Finish
FCXXXX	XXX	XX	XX

FCXXXX	Length (L) +/- .031	Leg Height (H) +/- .031
FC8139	2	1
FC8140	2-1/2	1
FC8141	3	1
FC8142	3-1/2	1
FC8143	4	1
FC8144	4-1/4	1
FC8145	4-1/2	1
FC8146	5	1
FC8147	6	1
FC8148	2	1-1/8
FC8149	3	1-1/8
FC8150	4	1-1/8
FC8151	4-1/4	1-1/8
FC8152	4-9/16	1-1/8
FC8153	2	1-1/4
FC8154	2-1/2	1-1/4
FC8155	3	1-1/4
FC8156	3-1/2	1-1/4
FC8157	4	1-1/4
FC8158	2	1-5/16
FC8159	2-1/4	1-5/16
FC8160	2-1/2	1-5/16
FC8161	2-3/4	1-5/16
FC8162	2-13/16	1-5/16
FC8163	3	1-5/16
FC8164	4	1-5/16
FC8165	4-1/4	1-5/16
FC8166	2	1-3/8
FC8167	2-1/2	1-3/8
FC8168	3	1-3/8
FC8169	4	1-3/8
FC8170	4-1/4	1-3/8
FC8171	5	1-3/8
FC8172	2	1-1/2
FC8173	2-1/8	1-1/2
FC8174	2-1/4	1-1/2
FC8175	2-3/8	1-1/2
FC8176	2-1/2	1-1/2
FC8177	2-3/4	1-1/2
FC8178	3	1-1/2
FC8179	3-1/8	1-1/2
FC8180	3-1/4	1-1/2
FC8181	3-1/2	1-1/2
FC8182	4	1-1/2
FC8183	4-1/4	1-1/2
FC8184	4-1/2	1-1/2
FC8185	4-9/16	1-1/2
FC8186	4-5/8	1-1/2
FC8187	5	1-1/2
FC8188	5-1/4	1-1/2

FCXXXX	Length (L) +/- .031	Leg Height (H) +/- .031
FC8177	2-3/4	1-1/2
FC8189	5-1/2	1-1/2
FC8190	5-3/4	1-1/2
FC8191	6	1-1/2
FC8192	6-7/16	1-1/2
FC8193	6-1/2	1-1/2
FC8194	7	1-1/2
FC8195	3	1-3/4
FC8196	3-1/2	1-3/4
FC8197	4	1-3/4
FC8198	4-1/4	1-3/4
FC8199	4-1/2	1-3/4
FC8200	4-9/16	1-3/4
FC8201	4-5/8	1-3/4
FC8202	4-3/4	1-3/4
FC8203	5	1-3/4
FC8204	5-1/8	1-3/4
FC8205	5-1/4	1-3/4
FC8206	5-1/2	1-3/4
FC8207	5-3/4	1-3/4
FC8208	6	1-3/4
FC8209	6-1/4	1-3/4
FC8210	6-7/16	1-3/4
FC8211	6-1/2	1-3/4
FC8212	6-3/4	1-3/4
FC8213	7	1-3/4

Thread (A) Short lengths, 'A' tapped to maximum depth			
Code (XXX)	Thread	(A)	
832	8-32	7/16	
1032	10-32	5/16 - 5/8	

Material	
Material Code (XX)	
A	Aluminum
B	Brass
SS	Stainless Steel

Compatible Finish	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.