


1/4 Round Off-Set Internal Thread Handles

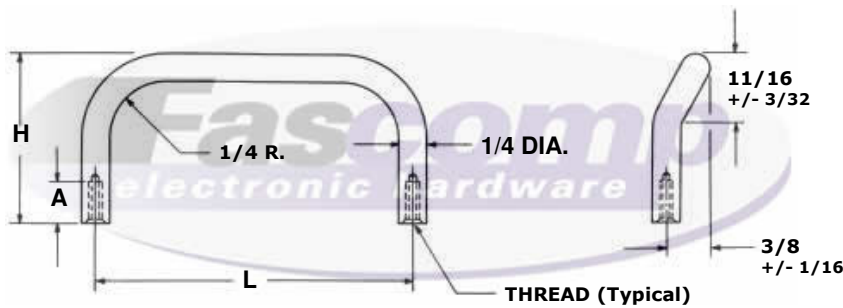

Create a part number:

Part	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

✓	FCXXXX	Length (L) +/- .031	Leg Height (H) +/- .031
	FC8260	2	1
	FC8261	3	1
	FC8262	4	1
	FC8263	4-1/2	1
	FC8264	5	1
	FC8265	6	1
	FC8266	2	1-1/2
	FC8267	3	1-1/2
	FC8268	4	1-1/2
	FC8269	4-1/2	1-1/2
	FC8270	5	1-1/2
	FC8271	5-1/2	1-1/2
	FC8272	6	1-1/2
	FC8373	2	2
	FC8274	3	2
	FC8275	4	2
	FC8276	4-1/2	2
	FC8277	5	2
	FC8278	6	2

Thread (A)			
Short lengths, 'A' tapped to maximum depth			
✓	Code (XXX)	Thread	(A)
	632	6-32	5/16 - 7/16
	832	8-32	5/16 - 7/16

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	SS	Stainless Steel

✓	Compatible Finish	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)

**Tolerances
Unless otherwise Specified**
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges



Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.