


3/8 Round Off-Set Internal Thread Handles

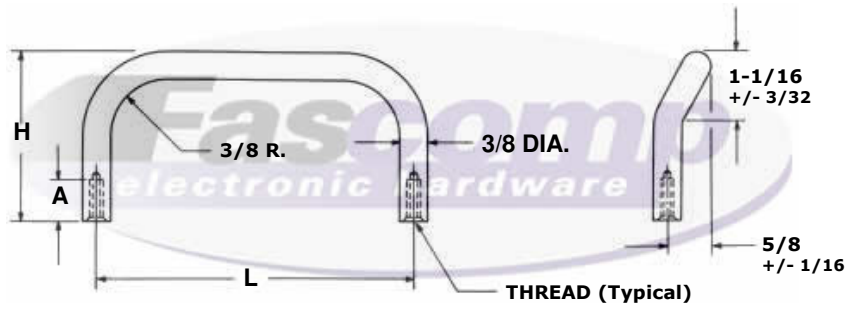

Create a part number:

Part	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

✓	FCXXXX	Length (L) +/- .031	Leg Height (H) +/- .031
	FC8301	3	1-3/4
	FC8302	4	1-3/4
	FC8303	4-1/4	1-3/4
	FC8304	4-1/2	1-3/4
	FC8305	4-9/16	1-3/4
	FC8306	5	1-3/4
	FC8307	5-1/2	1-3/4
	FC8308	6	1-3/4
	FC8309	3	2
	FC8310	4	2
	FC8311	4-1/4	2
	FC8312	4-1/2	2
	FC8313	4-9/16	2
	FC8314	5	2
	FC8315	5-1/2	2
	FC8316	6	2

Thread (A)			
Short lengths, 'A' tapped to maximum depth			
✓	Code (XXX)	Thread	(A)
	832	8-32	5/16 - 7/16
	1032	10-32	1/2 - 9/16

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	SS	Stainless Steel

✓ Compatible Finish		
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	

Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.