


Metric 13mm Hex Male-Female Standoff

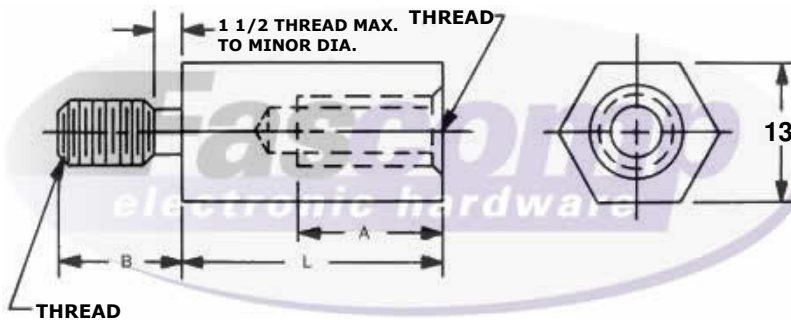

Length Table		
✓ FMXXXX	Length (L)	
FM2260	5	
FM2261	6	
FM2262	7	
FM2263	8	
FM2264	9	
FM2265	10	
FM2266	11	
FM2267	12	
FM2268	13	
FM2269	14	
FM2270	15	
FM2271	16	
FM2272	17	
FM2273	18	
FM2274	19	
FM2275	20	
FM2276	21	
FM2277	22	
FM2278	23	
FM2279	24	
FM2280	25	
FM2281	28	
FM2282	31	
FM2283	34	
FM2284	37	
FM2285	40	
FM2286	43	
FM2287	46	
FM2288	49	
FM2289	52	

Create a part number:			
Length	Thread	Material	Finish
FMXXXX	XXXX	XX	XX
_____ - _____ - _____ - _____			

Thread				
Short lengths, 'A' tapped to maximum depth				
✓	Thread Code (XXX)	Thread	Depth (A)	Length (B)
	5008	M5x0.8	12.7	9.53
	6010	M6x1	15	12.7
	8012	M8x1.25	15	12.7

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel

Tolerances Unless otherwise Specified
 .xxx +/- .13mm
 .xx +/- .26mm
 Angular +/- 1 Degree
 Linear +/- .13mm
Break all sharp edges

✓ Compatible Finish		
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.