


Metric 5mm Hex Male-Female Standoff

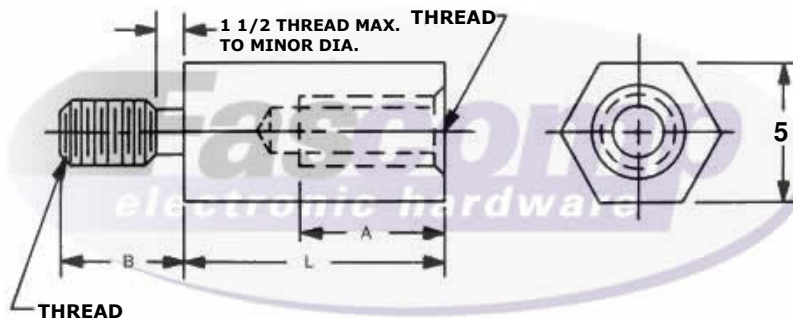

Length Table		
✓	FMXXXXXX	Length (L)
	FM212900	5
	FM212901	6
	FM212902	7
	FM212903	8
	FM212904	9
	FM212905	10
	FM212906	11
	FM212907	12
	FM212908	13
	FM212909	14
	FM212910	15
	FM212911	16
	FM212912	17
	FM212913	18
	FM212914	19
	FM212915	20
	FM212916	21
	FM212917	22
	FM212918	23
	FM212919	24
	FM212920	25
	FM212921	28
	FM212922	31
	FM212923	34
	FM212924	37
	FM212925	40
	FM212926	43
	FM212927	46
	FM212928	49
	FM212929	52

Create a part number:

Length	Thread	Material	Finish
FMXXXXXX	XXXX	XX	XX
_____	_____	_____	_____

Thread				
Short lengths, 'A' tapped to maximum depth				
✓	Thread Code (XXX)	Thread	Depth (A)	Length (B)
	2545	M2.5x0.45	4.8	3.97
	3005	M3x0.5	6.4	4.76

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel

Tolerances
Unless otherwise Specified
 .xxx +/- .13mm
 .xx +/- .26mm
 Angular +/- 1 Degree
 Linear +/- .13mm
Break all sharp edges

✓	Compatible Finish	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.