


Metric 5.5mm Hex Male-Female Standoff

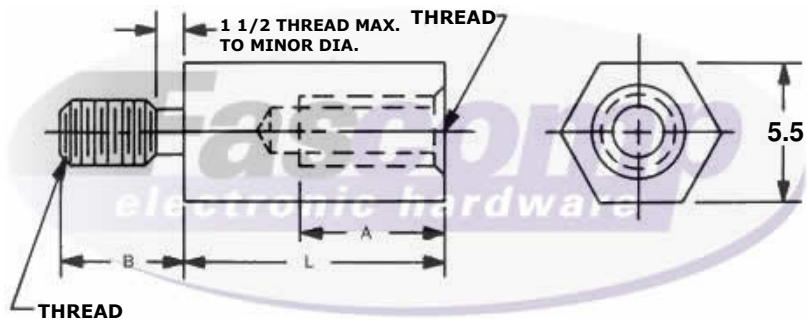

Length Table		
✓ FMXXXXXX	Length (L)	
FM212930	5	
FM212931	6	
FM212932	7	
FM212933	8	
FM212934	9	
FM212935	10	
FM212936	11	
FM212937	12	
FM212938	13	
FM212939	14	
FM212940	15	
FM212941	16	
FM212942	17	
FM212943	18	
FM212944	19	
FM212945	20	
FM212946	21	
FM212947	22	
FM212948	23	
FM212949	24	
FM212950	25	
FM212951	28	
FM212952	31	
FM212953	34	
FM212954	37	
FM212955	40	
FM212956	43	
FM212957	46	
FM212958	49	
FM212959	52	

Create a part number:

Length	Thread	Material	Finish
FMXXXXXX	XXXX	XX	XX
_____ - _____ - _____ - _____			

Thread				
Short lengths, 'A' tapped to maximum depth				
✓ Thread Code (XXX)	Thread	Depth (A)	Length (B)	
2545	M2.5x0.45	4.8	3.97	
3005	M3x0.5	6.4	4.76	

Material		
✓ Material Code (XX)		
A	Aluminum	
B	Brass	
S	Steel	
SS	Stainless Steel	

Tolerances Unless otherwise Specified
 .xxx +/- .13mm
 .xx +/- .26mm
 Angular +/- 1 Degree
 Linear +/- .13mm
Break all sharp edges

✓ Compatible Finish		
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.