


# Metric 10mm Hex Female Standoff

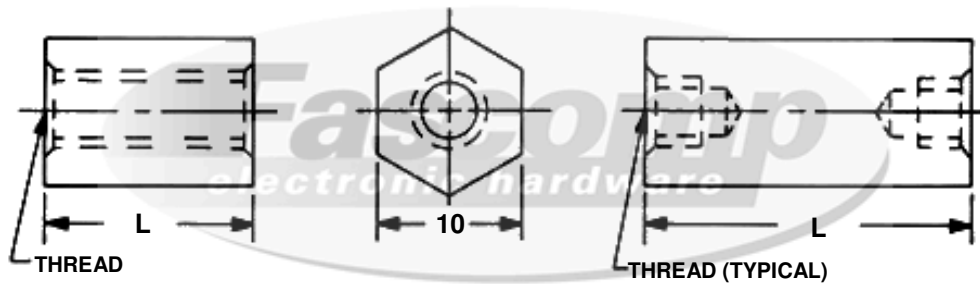

Length Table		
✓ FMXXXX	Length (L)	
FM1400	3	
FM1401	4	
FM1402	5	
FM1403	6	
FM1404	7	
FM1405	8	
FM1406	9	
FM1407	10	
FM1408	11	
FM1409	12	
FM1410	13	
FM1411	14	
FM1412	15	
FM1413	16	
FM1414	17	
FM1415	18	
FM1416	19	
FM1417	20	
FM1418	21	
FM1419	22	
FM1420	23	
FM1421	24	
FM1422	25	
FM1423	28	
FM1424	31	
FM1425	34	
FM1426	37	
FM1427	40	
FM1428	43	
FM1429	46	
FM1430	49	
FM1431	52	

**Create a part number:**

Length	Thread	Material	Finish
FMXXXX	XXXX	XX	XX
<div style="border-top: 1px solid black; border-bottom: 1px solid black; border-left: 1px solid black; border-right: 1px solid black; width: 100%;"></div>			

Thread				
✓ Thread Code (XXX)	Tapped Thru		Longer Parts	
	A, B, S	SS	Blind Tap Depth	
3506	25	25	9.5	
4007	25	25	11.1	
5008	28	25	12.7	

Material		
✓ Material Code (XX)		
A	Aluminum	
B	Brass	
S	Steel	
SS	Stainless Steel	

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

**Tolerances**  
**Unless otherwise Specified**  
 .xxx +/- .13mm  
 .xx +/- .26mm  
 Angular +/- 1 Degree  
 Linear +/- .13mm  
**Break all sharp edges**

✓ Compatible Finish		
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:  
 To be produced by  
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.