


Metric 13mm Hex Female Standoff

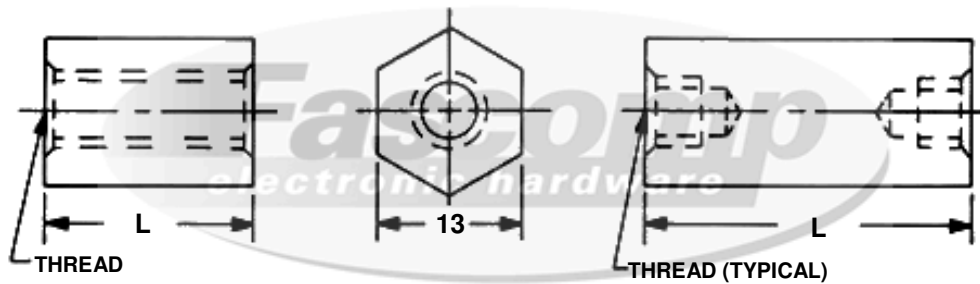

Length Table		
✓ FMXXXX	Length (L)	
FM1450	3	
FM1451	4	
FM1452	5	
FM1453	6	
FM1454	7	
FM1455	8	
FM1456	9	
FM1457	10	
FM1458	11	
FM1459	12	
FM1460	13	
FM1461	14	
FM1462	15	
FM1463	16	
FM1464	17	
FM1465	18	
FM1466	19	
FM1467	20	
FM1468	21	
FM1469	22	
FM1470	23	
FM1471	24	
FM1472	25	
FM1473	28	
FM1474	31	
FM1475	34	
FM1476	37	
FM1477	40	
FM1478	43	
FM1479	46	
FM1480	49	
FM1481	52	

Create a part number:

Length	Thread	Material	Finish
FMXXXX	XXXX	XX	XX
_____ - _____ - _____ - _____			

Thread			
Thread Code	Tapped Thru		Longer Parts
✓ (XXX)	A, B, S	SS	Blind Tap Depth
4007	25	25	11.1
5008	28	25	12.7
6010	31	31	16

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material		
✓ Material Code (XX)		
A	Aluminum	
B	Brass	
S	Steel	
SS	Stainless Steel	

Tolerances
Unless otherwise Specified
 .xxx +/- .13mm
 .xx +/- .26mm
 Angular +/- 1 Degree
 Linear +/- .13mm
Break all sharp edges

✓	Compatible Finish	
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.