


# Metric 4.5mm Hex Female Standoff

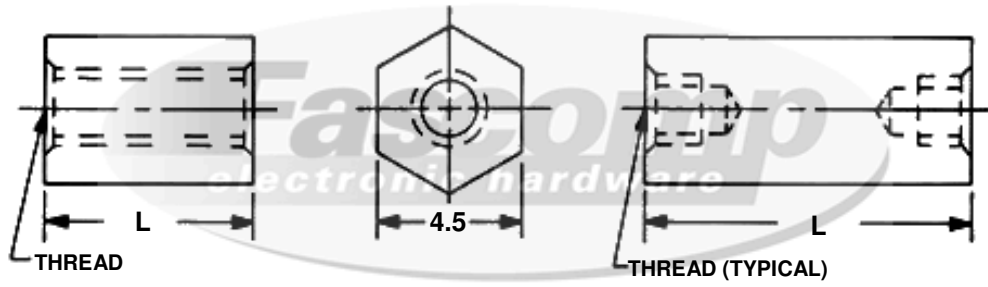

Length Table		
✓ FMXXXX	Length (L)	
FM1250	3	
FM1251	4	
FM1252	5	
FM1253	6	
FM1254	7	
FM1255	8	
FM1256	9	
FM1257	10	
FM1258	11	
FM1259	12	
FM1260	13	
FM1261	14	
FM1262	15	
FM1263	16	
FM1264	17	
FM1265	18	
FM1266	19	
FM1267	20	
FM1268	21	
FM1269	22	
FM1270	23	
FM1271	24	
FM1272	25	
FM1273	28	
FM1274	31	
FM1275	34	
FM1276	37	
FM1277	40	
FM1278	43	
FM1279	46	
FM1280	49	
FM1281	52	

**Create a part number:**

<b>Length</b>	<b>Thread</b>	<b>Material</b>	<b>Finish</b>
<b>FMXXXX</b>	<b>XXXX</b>	<b>XX</b>	<b>XX</b>
_____ - _____ - _____ - _____			

Thread				
✓ Thread Code (XXX)	Tapped Thru		Longer Parts	
	A, B, S	SS	Blind Tap Depth	
2545	19	16	4.7	
3005	25	19	6.3	

**Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)**

Material		
✓ Material Code (XX)		
A	Aluminum	
B	Brass	
S	Steel	
SS	Stainless Steel	

**Tolerances**  
**Unless otherwise Specified**  
 .xxx +/- .13mm  
 .xx +/- .26mm  
 Angular +/- 1 Degree  
 Linear +/- .13mm  
**Break all sharp edges**

✓ Compatible Finish		
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:  
 To be produced by  
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.