


Metric 5mm Hex Female Standoff

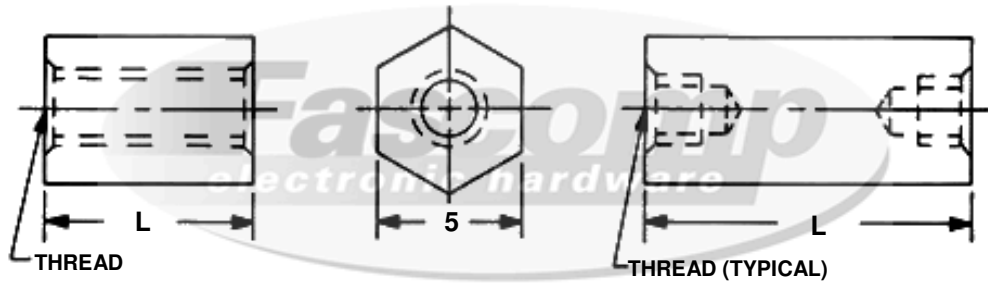

Length Table		
✓ FMXXXXXX	Length (L)	
FM128100	3	
FM128101	4	
FM128102	5	
FM128103	6	
FM128104	7	
FM128105	8	
FM128106	9	
FM128107	10	
FM128108	11	
FM128109	12	
FM128110	13	
FM128111	14	
FM128112	15	
FM128113	16	
FM128114	17	
FM128115	18	
FM128116	19	
FM128117	20	
FM128118	21	
FM128119	22	
FM128120	23	
FM128121	24	
FM128122	25	
FM128123	28	
FM128124	31	
FM128125	34	
FM128126	37	
FM128127	40	
FM128128	43	
FM128129	46	
FM128130	49	
FM128131	52	

Create a part number:

Length	Thread	Material	Finish
FMXXXXXX	XXXX	XX	XX
_____ - _____ - _____ - _____			

Thread				
✓ Thread Code (XXX)	Tapped Thru		Longer Parts	
	A, B, S	SS	Blind Tap Depth	
2545	19	16	4.7	
3005	25	19	6.3	

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material		
✓ Material Code (XX)		
A	Aluminum	
B	Brass	
S	Steel	
SS	Stainless Steel	

Tolerances Unless otherwise Specified
 .xxx +/- .13mm
 .xx +/- .26mm
 Angular +/- 1 Degree
 Linear +/- .13mm
Break all sharp edges

✓ Compatible Finish		
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.