


# Metric 5.5mm Hex Female Standoff

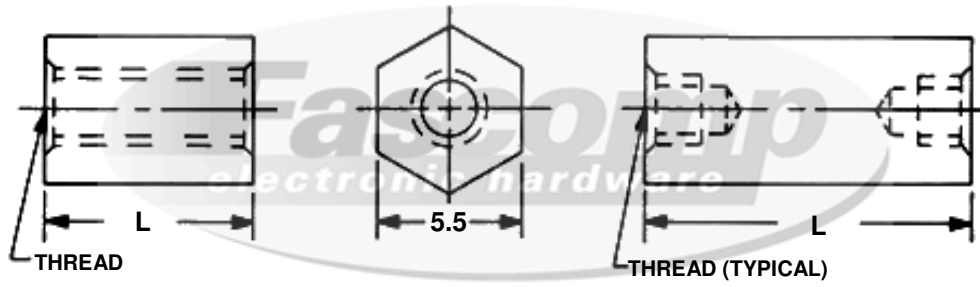

Length Table		
✓ FMXXXXXX	Length (L)	
FM128132	3	
FM128133	4	
FM128134	5	
FM128135	6	
FM128136	7	
FM128137	8	
FM128138	9	
FM128139	10	
FM128140	11	
FM128141	12	
FM128142	13	
FM128143	14	
FM128144	15	
FM128145	16	
FM128146	17	
FM128147	18	
FM128148	19	
FM128149	20	
FM128150	21	
FM128151	22	
FM128152	23	
FM128153	24	
FM128154	25	
FM128155	28	
FM128156	31	
FM128157	34	
FM128158	37	
FM128159	40	
FM128160	43	
FM128161	46	
FM128162	49	
FM128163	52	

**Create a part number:**

Length	Thread	Material	Finish
FMXXXXXX	XXXX	XX	XX
_____ - _____ - _____ - _____			

Thread				
✓ Thread Code (XXX)	Tapped Thru		Longer Parts	
	A, B, S	SS	Blind Tap Depth	
2545	19	16	4.7	
3005	25	19	6.3	

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material	
✓ Material Code (XX)	
A	Aluminum
B	Brass
S	Steel
SS	Stainless Steel

**Tolerances Unless otherwise Specified**  
 .xxx +/- .13mm  
 .xx +/- .26mm  
 Angular +/- 1 Degree  
 Linear +/- .13mm  
**Break all sharp edges**

✓ Compatible Finish	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:  
 To be produced by  
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.