


Metric 8mm Hex Female Standoff

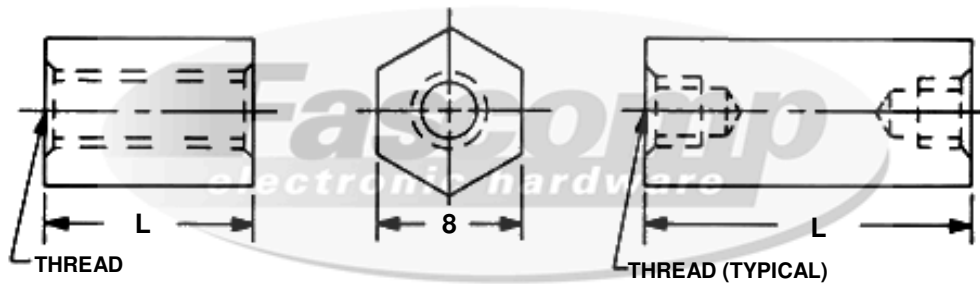

Length Table		
✓ FMXXX	Length (L)	
FM1350	3	
FM1351	4	
FM1352	5	
FM1353	6	
FM1354	7	
FM1355	8	
FM1356	9	
FM1357	10	
FM1358	11	
FM1359	12	
FM1360	13	
FM1361	14	
FM1362	15	
FM1363	16	
FM1364	17	
FM1365	18	
FM1366	19	
FM1367	20	
FM1368	21	
FM1369	22	
FM1370	23	
FM1371	24	
FM1372	25	
FM1373	28	
FM1374	31	
FM1375	34	
FM1376	37	
FM1377	40	
FM1378	43	
FM1379	46	
FM1380	49	
FM1381	52	

Create a part number:

Length	Thread	Material	Finish
FMXXXX	XXXX	XX	XX
_____ - _____ - _____ - _____			

✓	Thread			
	Thread Code	Tapped Thru		Longer Parts
	(XXX)	A, B, S	SS	Blind Tap Depth
	3005	25	19	6.3
	3506	25	25	9.5
	4007	25	25	11.1
	5008	28	25	12.7

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Tolerances
Unless otherwise Specified
 .xxx +/- .13mm
 .xx +/- .26mm
 Angular +/- 1 Degree
 Linear +/- .13mm
Break all sharp edges

✓	Compatible Finish	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.