


Metric 10mm Round Female Standoff

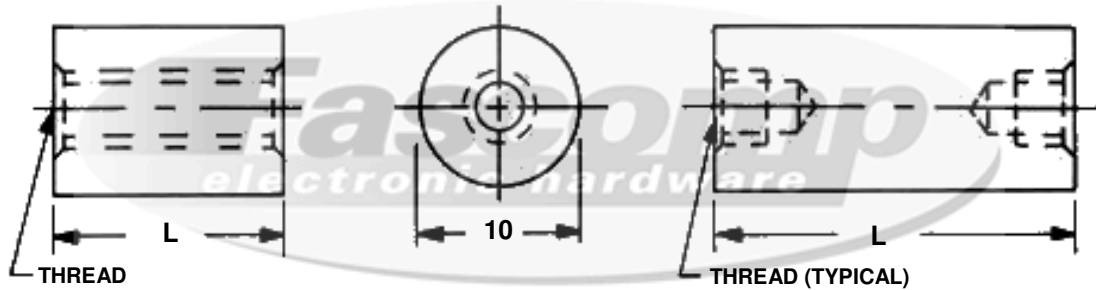

Length Table		
✓ FMXXXX	Length (L)	
FM1150	3	
FM1151	4	
FM1152	5	
FM1153	6	
FM1154	7	
FM1155	8	
FM1156	9	
FM1157	10	
FM1158	11	
FM1159	12	
FM1160	13	
FM1161	14	
FM1162	15	
FM1163	16	
FM1164	17	
FM1165	18	
FM1166	19	
FM1167	20	
FM1168	21	
FM1169	22	
FM1170	23	
FM1171	24	
FM1172	25	
FM1173	28	
FM1174	31	
FM1175	34	
FM1176	37	
FM1177	40	
FM1178	43	
FM1179	46	
FM1180	49	
FM1181	52	

Create a part number:

Length	Thread	Material	Finish
FMXXXX	XXX	XX	XX
<div style="border-top: 1px solid black; border-bottom: 1px solid black; border-left: 1px solid black; border-right: 1px solid black; width: 100%;"></div>			

Thread				
✓ Thread Code (XXX)	Tapped Thru		Longer Parts	
	A, B, S	SS	Blind Tap Depth	
3506	25	25	9.5	
4007	25	25	11.1	
5008	28	25	12.7	

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material	
✓ Material Code (XX)	
A	Aluminum
B	Brass
S	Steel
SS	Stainless Steel
N	Nylon

Tolerances Unless otherwise Specified
 .xxx +/- .13mm
 .xx +/- .26mm
 Angular +/- 1 Degree
 Linear +/- .13mm
Break all sharp edges

✓ Compatible Finish		
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.