


Metric 13mm Round Female Standoff

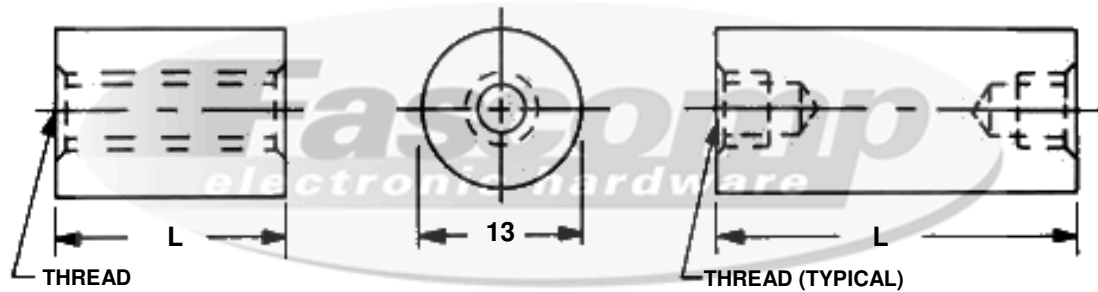

Length Table		
✓ FMXXXX	Length (L)	
FM1200	3	
FM1201	4	
FM1202	5	
FM1203	6	
FM1204	7	
FM1205	8	
FM1206	9	
FM1207	10	
FM1208	11	
FM1209	12	
FM1210	13	
FM1211	14	
FM1212	15	
FM1213	16	
FM1214	17	
FM1215	18	
FM1216	19	
FM1217	20	
FM1218	21	
FM1219	22	
FM1220	23	
FM1221	24	
FM1222	25	
FM1223	28	
FM1224	31	
FM1225	34	
FM1226	37	
FM1227	40	
FM1228	43	
FM1229	46	
FM1230	49	
FM1231	52	

Create a part number:

Length	Thread	Material	Finish
FMXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread				
✓ Thread Code (XXX)	Tapped Thru		Longer Parts	
	A, B, S	SS	Blind Tap Depth	
4007	25	25	11.1	
5008	28	25	12.7	
6010	31	31	16	

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material		
✓ Material Code (XX)		
A	Aluminum	
B	Brass	
S	Steel	
SS	Stainless Steel	
N	Nylon	

Tolerances Unless otherwise Specified
 .xxx +/- .13mm
 .xx +/- .26mm
 Angular +/- 1 Degree
 Linear +/- .13mm
Break all sharp edges

✓	Compatible Finish	
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.