


Metric 4.5mm Round Female Standoff

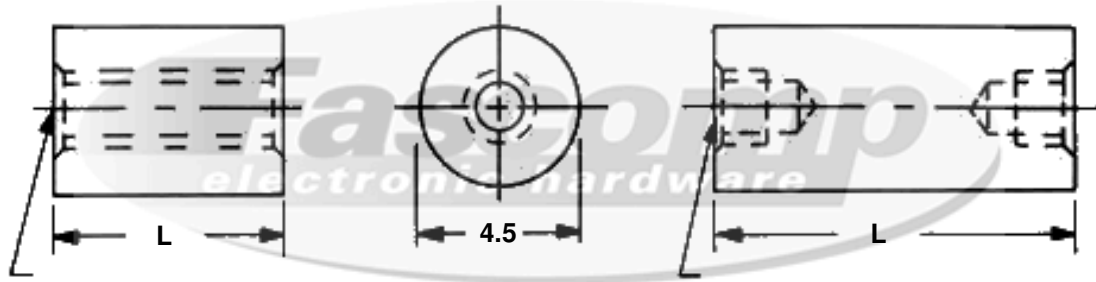

Length Table		
✓ FMXXXX	Length (L)	
FM1000	3	
FM1001	4	
FM1002	5	
FM1003	6	
FM1004	7	
FM1005	8	
FM1006	9	
FM1007	10	
FM1008	11	
FM1009	12	
FM1010	13	
FM1011	14	
FM1012	15	
FM1013	16	
FM1014	17	
FM1015	18	
FM1016	19	
FM1017	20	
FM1018	21	
FM1019	22	
FM1020	23	
FM1021	24	
FM1022	25	
FM1023	28	
FM1024	31	
FM1025	34	
FM1026	37	
FM1027	40	
FM1028	43	
FM1029	46	
FM1030	49	
FM1031	52	

Create a part number:

Length	Thread	Material	Finish
FMXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread				
✓ Thread Code (XXX)	Tapped Thru		Longer Parts	
	A, B, S	SS	Blind Tap Depth	
2545	19	16	4.7	
3005	25	19	6.3	

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material		
✓ Material Code (XX)		
A	Aluminum	
B	Brass	
S	Steel	
SS	Stainless Steel	
N	Nylon	

Tolerances Unless otherwise Specified
 .xxx +/- .13mm
 .xx +/- .26mm
 Angular +/- 1 Degree
 Linear +/- .13mm
Break all sharp edges

✓ Compatible Finish		
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.