


# Metric 6mm Round Female Standoff

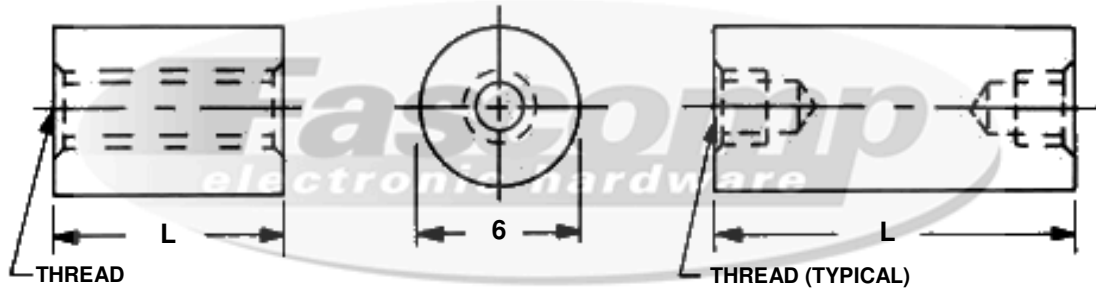

Length Table		
✓ FMXXXX	Length (L)	
FM1050	3	
FM1051	4	
FM1052	5	
FM1053	6	
FM1054	7	
FM1055	8	
FM1056	9	
FM1057	10	
FM1058	11	
FM1059	12	
FM1060	13	
FM1061	14	
FM1062	15	
FM1063	16	
FM1064	17	
FM1065	18	
FM1066	19	
FM1067	20	
FM1068	21	
FM1069	22	
FM1070	23	
FM1071	24	
FM1072	25	
FM1073	28	
FM1074	31	
FM1075	34	
FM1076	37	
FM1077	40	
FM1078	43	
FM1079	46	
FM1080	49	
FM1081	52	

**Create a part number:**

Length	Thread	Material	Finish
FMXXXX	XXX	XX	XX
<div style="border-top: 1px solid black; border-bottom: 1px solid black; border-left: 1px solid black; border-right: 1px solid black; width: 100%;"></div>			

✓	Thread			
	Thread Code	Tapped Thru		Longer Parts
	(XXX)	A, B, S	SS	Blind Tap Depth
	3005	25	19	6.3
	3506	25	25	9.5
	4007	25	25	11.1

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel
	N	Nylon

**Tolerances**  
**Unless otherwise Specified**  
 .xxx +/- .13mm  
 .xx +/- .26mm  
 Angular +/- 1 Degree  
 Linear +/- .13mm  
**Break all sharp edges**

✓	Compatible Finish	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:  
 To be produced by  
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.