


Metric 8mm Round Female Standoff

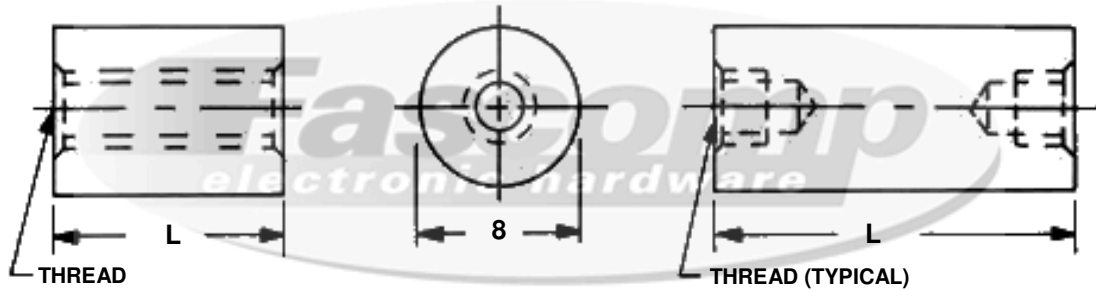

Length Table		
✓ FMXXXX	Length (L)	
FM1100	3	
FM1101	4	
FM1102	5	
FM1103	6	
FM1104	7	
FM1105	8	
FM1106	9	
FM1107	10	
FM1108	11	
FM1109	12	
FM1110	13	
FM1111	14	
FM1112	15	
FM1113	16	
FM1114	17	
FM1115	18	
FM1116	19	
FM1117	20	
FM1118	21	
FM1119	22	
FM1120	23	
FM1121	24	
FM1122	25	
FM1123	28	
FM1124	31	
FM1125	34	
FM1126	37	
FM1127	40	
FM1128	43	
FM1129	46	
FM1130	49	
FM1131	52	

Create a part number:

Length	Thread	Material	Finish
FMXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread				
Thread Code	Tapped Thru		Longer Parts	
(XXX)	A, B, S	SS	Blind Tap Depth	
3005	25	19	6.3	
3506	25	25	9.5	
4007	25	25	11.1	
5008	28	25	12.7	

Material		
✓ Material Code (XX)		
A	Aluminum	
B	Brass	
S	Steel	
SS	Stainless Steel	
N	Nylon	

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Tolerances
Unless otherwise Specified
 .xxx +/- .13mm
 .xx +/- .26mm
 Angular +/- 1 Degree
 Linear +/- .13mm
Break all sharp edges

✓ Compatible Finish		
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.