


Metric Spacers 4.5 mm

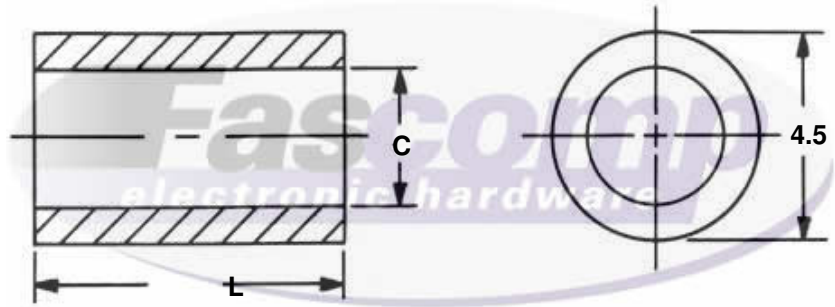

Create a part number:

Length	Clearance	Material	Finish
FMXXXX	XX	XX	XX
_____ . _____ . _____ . _____			

Hex Code Table		
✓	FMXXXX	Length (L)
	FM0500	1
	FM0501	2
	FM0502	3
	FM0503	4
	FM0504	5
	FM0505	6
	FM0506	7
	FM0507	8
	FM0508	9
	FM0509	10
	FM0510	11
	FM0511	12
	FM0512	13
	FM0513	14
	FM0514	15
	FM0515	16
	FM0516	17
	FM0517	18
	FM0518	19
	FM0519	20
	FM0520	21
	FM0521	22
	FM0522	23
	FM0523	24
	FM0524	25

Hole Clearance Code (XX)			
✓	Code (XX)	Thread	C +0.3 -0.0
	25	M2.5	2.7
	3	M3	3.2

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel
	N	Nylon

**Tolerances
Unless otherwise Specified**
 .xxx +/- .13mm
 .xx +/- .26mm
 Angular +/- 1 Degree
 Linear +/- .13mm
Break all sharp edges

✓ Compatible Finish		
A, B, S, SS	0	Plain
B, S	5	Nickel Plate (QQ-N-290)
A	6	Iridite #14 Gold (MIL-C-5541E)
A	7	Iridite Clear (MIL-C-5541E)
A	9	Alodine 1200
B, S	12	Zinc Clear (ASTM-B-633)
B, S	16	Electro Tin (MIL-T-10727 TYPE 1)
SS	20	Passivation (MIL-F-14072D)
A	22	Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24	Black Anodize (MIL-A-8625)
B, S, SS	26	Black Oxide
B, S	28	Zinc Yellow (ASTM-B-633)



Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.