


Metric 10mm Hex Male-Female Standoff

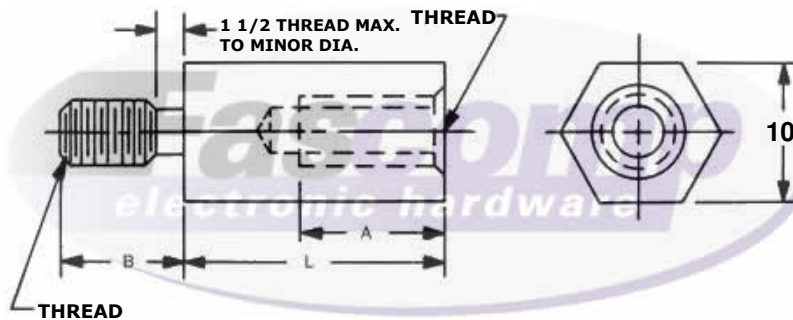

Length Table		
✓ FMXXXX	Length (L)	
FM2220	5	
FM2221	6	
FM2222	7	
FM2223	8	
FM2224	9	
FM2225	10	
FM2226	11	
FM2227	12	
FM2228	13	
FM2229	14	
FM2230	15	
FM2231	16	
FM2232	17	
FM2233	18	
FM2234	19	
FM2235	20	
FM2236	21	
FM2237	22	
FM2238	23	
FM2239	24	
FM2240	25	
FM2241	28	
FM2242	31	
FM2243	34	
FM2244	37	
FM2245	40	
FM2246	43	
FM2247	46	
FM2248	49	
FM2249	52	

Create a part number:

Length	Thread	Material	Finish
FMXXXX	XXXX	XX	XX
_____ - _____ - _____ - _____			

Thread				
Short lengths, 'A' tapped to maximum depth				
✓	Thread Code (XXX)	Thread	Depth (A)	Length (B)
	3005	M3x0.5	6.4	4.76
	3506	M3.5x0.6	9.5	6.35
	4007	M5x0.8	12.7	9.53
	5008	M5x0.8	12.7	9.53

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel

**Tolerances
Unless otherwise Specified**
 .xxx +/- .13mm
 .xx +/- .26mm
 Angular +/- 1 Degree
 Linear +/- .13mm
Break all sharp edges

✓	Compatible Finish	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.