


Hex Length Table		
✓ FCXXXX	Length (L)	
FC4620	1/4	
FC4621	5/16	
FC4622	3/8	
FC4623	7/16	
FC4624	1/2	
FC4625	9/16	
FC4626	5/8	
FC4627	11/16	
FC4628	3/4	
FC4629	13/16	
FC4630	7/8	
FC4631	15/16	
FC4632	1	
FC4633	1-1/16	
FC4634	1-1/8	
FC4635	1-3/16	
FC4636	1-1/4	
FC4637	1-5/16	
FC4638	1-3/8	
FC4639	1-7/16	
FC4640	1-1/2	
FC4641	1-9/16	
FC4642	1-5/8	
FC4643	1-11/16	
FC4644	1-3/4	
FC4645	1-13/16	
FC4646	1-7/8	
FC4647	1-15/16	
FC4648	2	
FC4649	2-1/8	
FC4650	2-1/4	
FC4651	2-3/8	
FC4652	2-1/2	
FC4653	2-5/8	
FC4654	2-3/4	
FC4655	2-7/8	
FC4656	3	
FC4657	3-1/4	
FC4658	3-1/2	
FC4659	3-3/4	
FC4660	4	
FC4661	4-1/4	
FC4662	4-1/2	
FC4663	4-3/4	
FC4664	5	
FC4665	5-1/4	
FC4666	5-1/2	
FC4667	5-3/4	
FC4668	6	

3/8 Hex Male-Female Standoff

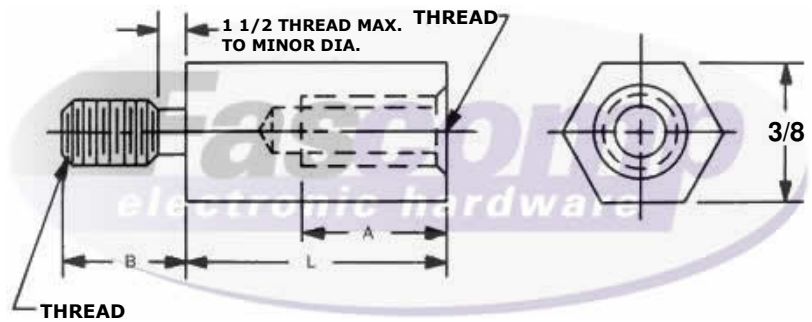

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread			
Short lengths, 'A' tapped to maximum depth			
✓ Thread Code (XXX)	Depth (A)	Length (B)	
440	1/4	3/16	
632	3/8	1/4	
832	7/16	3/8	
1032	1/2	3/8	
1224	1/2	3/8	

Material		
✓ Material Code (XX)		
A	Aluminum	
B	Brass	
S	Steel	
SS	Stainless Steel	
N	Nylon	

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓ Compatible Finish		
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.