


Hex Length Table	
FCXXXX	Length (L)
FC4169	1/4
FC4170	5/16
FC4171	3/8
FC4172	7/16
FC4173	1/2
FC4174	9/16
FC4175	5/8
FC4176	11/16
FC4177	3/4
FC4178	13/16
FC4179	7/8
FC4180	15/16
FC4181	1
FC4182	1-1/16
FC4183	1-1/8
FC4184	1-3/16
FC4185	1-1/4
FC4186	1-5/16
FC4187	1-3/8
FC4188	1-7/16
FC4189	1-1/2
FC4190	1-9/16
FC4191	1-5/8
FC4192	1-11/16
FC4193	1-3/4
FC4194	1-13/16
FC4195	1-7/8
FC4196	1-15/16
FC4197	2
FC4198	2-1/8
FC4199	2-1/4
FC4200	2-3/8
FC4201	2-1/2
FC4202	2-5/8
FC4203	2-3/4
FC4204	2-7/8
FC4205	3
FC4206	3-1/4
FC4207	3-1/2
FC4208	3-3/4
FC4209	4
FC4210	4-1/4
FC4211	4-1/2
FC4212	4-3/4
FC4213	5
FC4214	5-1/4
FC4215	5-1/2
FC4216	5-3/4
FC4217	6

1/2 Round Male-Female Standoff

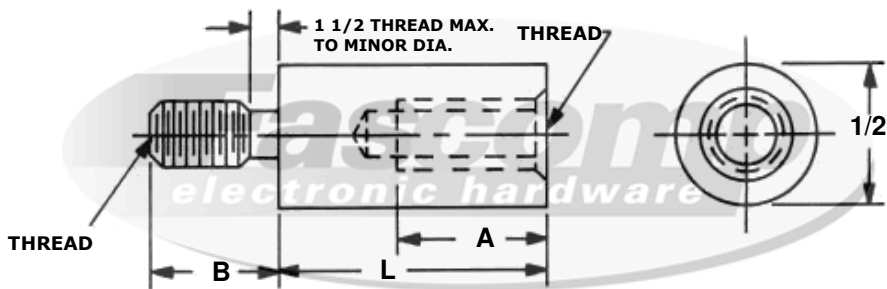

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread			
Short lengths, 'A' tapped to maximum depth			
Thread Code (XXX)	Depth (A)	Length (B)	
1032	1/2	3/8	
1224	1/2	3/8	
2520	5/8	1/2	
3118	5/8	1/2	

Material		
Material Code (XX)		
A	Aluminum	
B	Brass	
S	Steel	
SS	Stainless Steel	
N	Nylon	

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

Compatible Finish	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.