


1/4 Round Male-Female Standoff

| Hex Length Table | | |
|------------------|------------|--|
| ✓ FCXXXX | Length (L) | |
| FC4030 | 1/4 | |
| FC4031 | 5/16 | |
| FC4032 | 3/8 | |
| FC4033 | 7/16 | |
| FC4034 | 1/2 | |
| FC4035 | 9/16 | |
| FC4036 | 5/8 | |
| FC4037 | 11/16 | |
| FC4038 | 3/4 | |
| FC4039 | 13/16 | |
| FC4040 | 7/8 | |
| FC4041 | 15/16 | |
| FC4042 | 1 | |
| FC4043 | 1-1/16 | |
| FC4044 | 1-1/8 | |
| FC4045 | 1-3/16 | |
| FC4046 | 1-1/4 | |
| FC4047 | 1-5/16 | |
| FC4048 | 1-3/8 | |
| FC4049 | 1-7/16 | |
| FC4050 | 1-1/2 | |
| FC4051 | 1-9/16 | |
| FC4052 | 1-5/8 | |
| FC4053 | 1-11/16 | |
| FC4054 | 1-3/4 | |
| FC4055 | 1-13/16 | |
| FC4056 | 1-7/8 | |
| FC4057 | 1-15/16 | |
| FC4058 | 2 | |
| FC4059 | 2-1/8 | |
| FC4060 | 2-1/4 | |
| FC4061 | 2-3/8 | |
| FC4062 | 2-1/2 | |
| FC4063 | 2-5/8 | |
| FC4064 | 2-3/4 | |
| FC4065 | 2-7/8 | |
| FC4066 | 3 | |
| FC4067 | 3-1/4 | |
| FC4068 | 3-1/2 | |
| FC4069 | 3-3/4 | |
| FC4070 | 4 | |

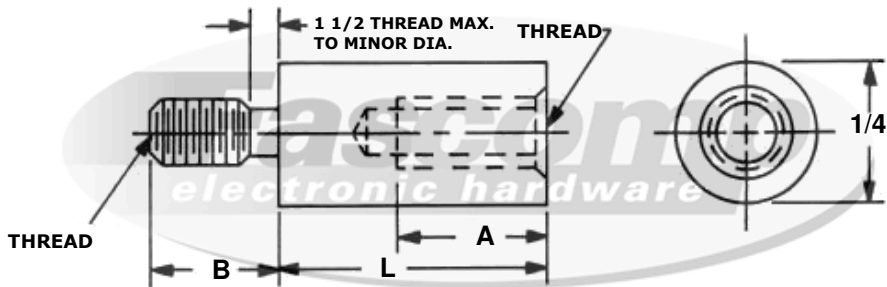

Create a part number:

| Length | Thread | Material | Finish |
|-------------------------------|--------|----------|--------|
| FCXXXX | XXX | XX | XX |
| _____ - _____ - _____ - _____ | | | |

| Thread | | | |
|--|-------------------|-----------|------------|
| Short lengths, 'A' tapped to maximum depth | | | |
| ✓ | Thread Code (XXX) | Depth (A) | Length (B) |
| | 256 | 3/16 | 5/32 |
| | 440 | 1/4 | 3/16 |
| | 632 | 3/8 | 1/4 |
| | 832 | 7/16 | 3/8 |

| Material | | |
|----------------------|-----------------|--|
| ✓ Material Code (XX) | | |
| A | Aluminum | |
| B | Brass | |
| S | Steel | |
| SS | Stainless Steel | |
| N | Nylon | |

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

| ✓ Compatible Finish | |
|---------------------|--|
| A, B, S, SS | 0 - Plain |
| B, S | 5 - Nickel Plate (QQ-N-290) |
| A | 6 - Iridite #14 Gold (MIL-C-5541E) |
| A | 7 - Iridite Clear (MIL-C-5541E) |
| A | 9 - Alodine 1200 |
| B, S | 12 - Zinc Clear (ASTM-B-633) |
| B, S | 16 - Electro Tin (MIL-T-10727 TYPE 1) |
| SS | 20 - Passivation (MIL-F-14072D) |
| A | 22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear) |
| A | 24 - Black Anodize (MIL-A-8625) |
| B, S, SS | 26 - Black Oxide |
| B, S | 28 - Zinc Yellow (ASTM-B-633) |



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.