


3/16 Round Male-Female Standoff

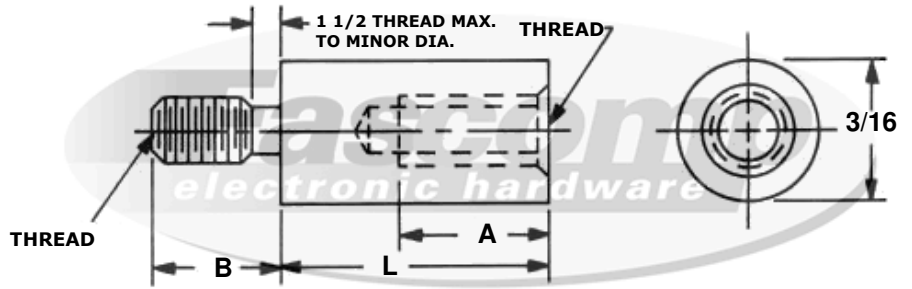

Hex Length Table		
✓ FCXXXX	Length (L)	
FC4000	3/16	
FC4001	1/4	
FC4002	5/16	
FC4003	3/8	
FC4004	7/16	
FC4005	1/2	
FC4006	9/16	
FC4007	5/8	
FC4008	11/16	
FC4009	3/4	
FC4010	13/16	
FC4011	7/8	
FC4012	15/16	
FC4013	1	
FC4014	1-1/16	
FC4015	1-1/8	
FC4016	1-3/16	
FC4017	1-1/4	
FC4018	1-5/16	
FC4019	1-3/8	
FC4020	1-7/16	
FC4021	1-1/2	
FC4022	1-9/16	
FC4023	1-5/8	
FC4024	1-11/16	
FC4025	1-3/4	
FC4026	1-13/16	
FC4027	1-7/8	
FC4028	1-15/16	
FC4029	2	

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread			
Short lengths, 'A' tapped to maximum depth			
✓	Thread Code (XXX)	Depth (A)	Length (B)
	256	3/16	5/32
	440	1/4	3/16
	632	3/8	1/4

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel
	N	Nylon

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓	Compatible Finish	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.